


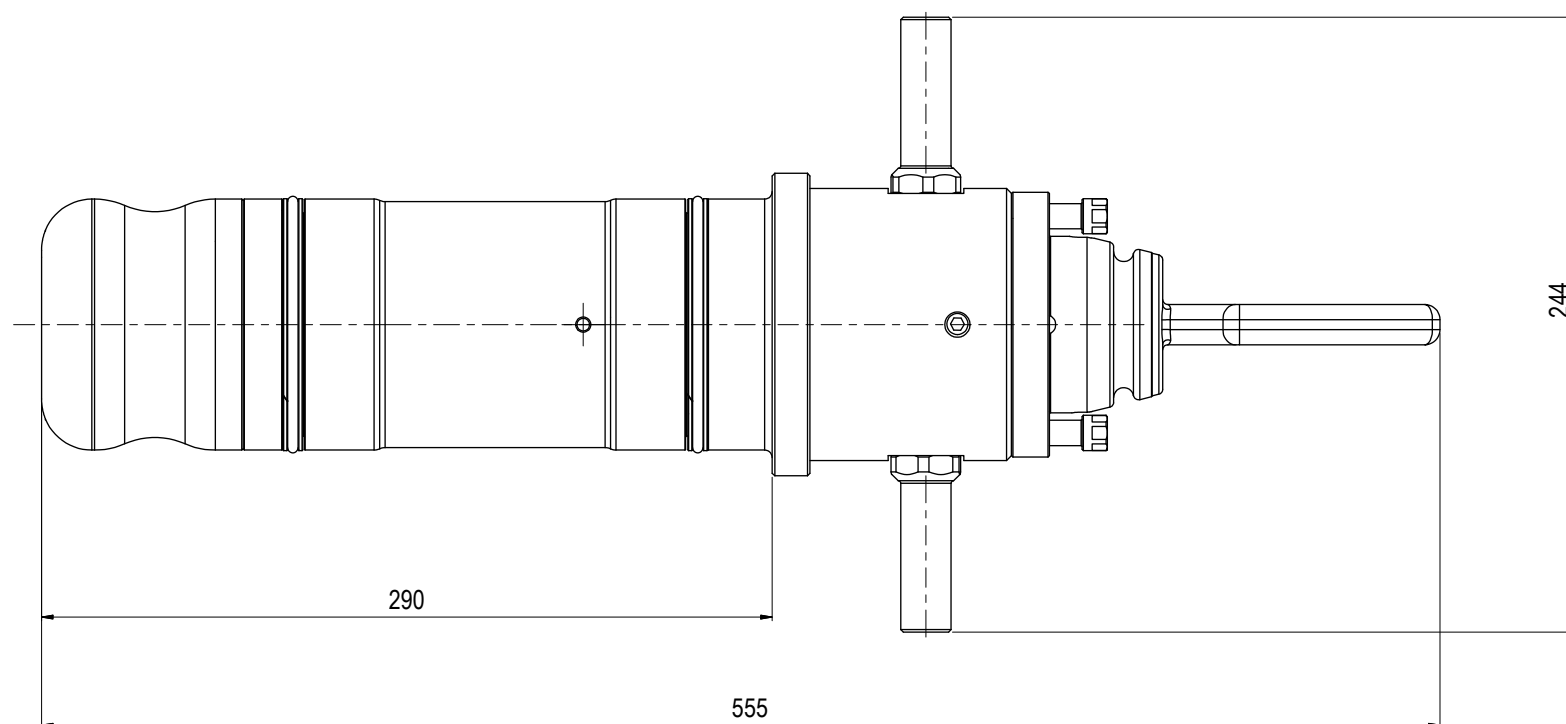

NOTE: 4

ADDITIONAL INFORMATION:

Ø100 Single Port Pressure Stab (blind stab) designed according to API 17H Type 4.

Fabricated in Super Duplex (S32750/S32760) material with Xylan coating and intended for long-term subsea service.

Integrated, manipulator-operated J-lock mechanism to lock the Stab into the Receptacle after connection. The pressure stab is equipped with a ROV operated pressure relief function, to ensure pressure bleed off prior to disconnection of the stab.

Bleed off function is activated by pulling the ROV handle prior to de-activation of the main J-Lock function.

Bleed off pull out force max approx 200kg @ 690bar

Stab nose in PEHD 1000 for gentle guiding of Stab into Receptacle.

Seal material is RU15 (HNBR) with back up rings in PEEK.



04	5.12.2025	9-IFU (Issued for Use)		HNJ	TAN	HNJ	BLUE LOGIC This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission	Dwg Scale: NTS	Drawing title: Ø100 SP Press Stab 10k Long-term wJ-Lock wBleed Off Function			
03	21.8.2024	9-IFU (Issued for Use)		WTJ	KOS	LGH		Dwg Proj: 				
02	28.5.2024	7-IFC (Issued for Construction)		HNJ	TAN	HNJ		Dwg Format: A3				
01	11.4.2024	2-IFT (Issued for Tender)		HNJ	NA	NA						
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.			Drawing number: BC1048		Rev. 04	