
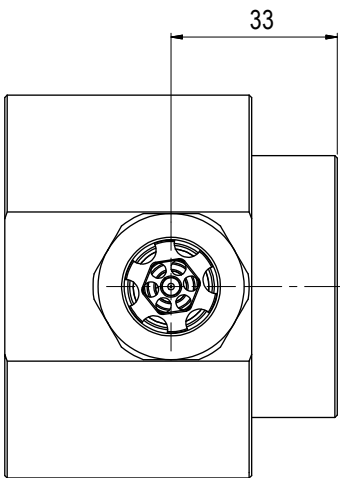
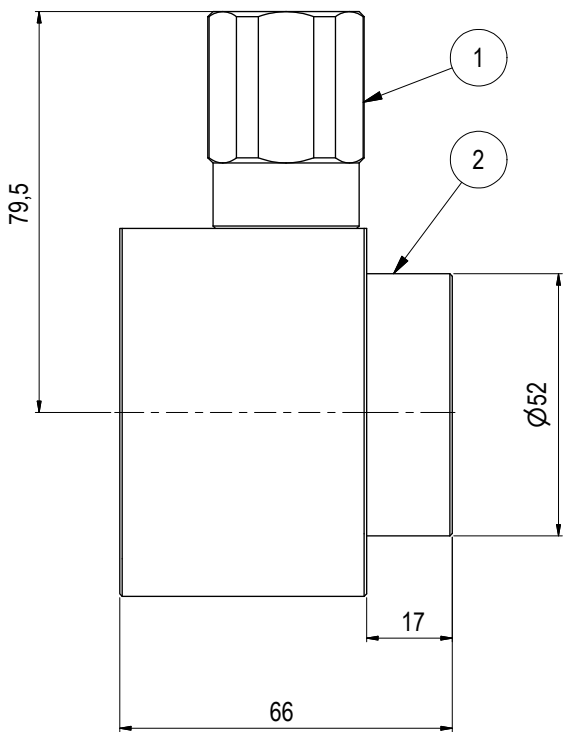


Parts List			
ITEM	QTY	PART No.	TITLE
2	1	BA1045	Ø35 SP Rec 10k Interv BSP 1/2"
1	1	PA0088	2-Way Check Valves 10k Interv BSP 1/2" - 2,0-0,5 Bar FM-M

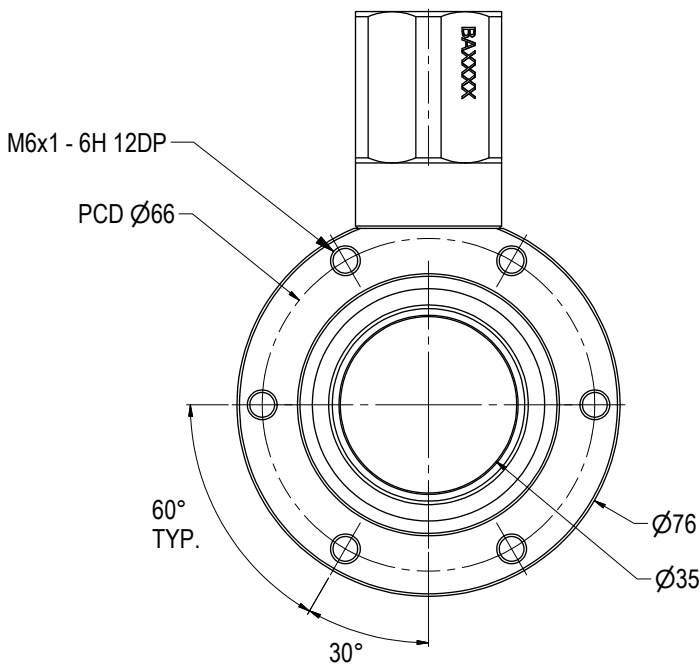

NOTE: 1
DESIGN CODE:
API 17H/6A


NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.01. Ø35 Hot Stab
Intermediate Group: 1.1.02. Receptacle
Sub Group: 1.1.2.01. Single

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Intervention
Weight: 1,6 kg
Volume: 0,2 dm^3
Submerged Weight: 1,38 kg
Surface Area: 449 cm^2
Hydraulic: BSP 1/2"
Mechanical: 6x M6@PCD 66
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
SPAREPARTS:
BA5287

NOTE: 5
ADDITIONAL INFORMATION:
The Ø35mm Blue Logic Hot Stab is made according to API 17H. This Hot Stab is in general designed for flow up to approx 25 liters pr. minute. We have pressure rating up to PSI 20K or 1380 Bar. The Hot Stab system can also be fitted with an lock-system.

Other hydraulic port interface can be delivered on customers request.

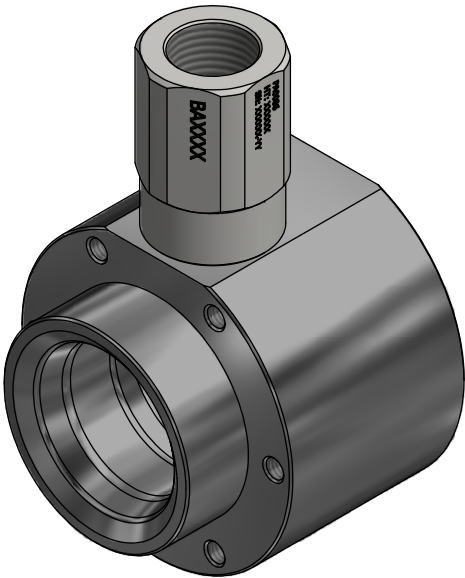

03	2.10.2025	9-IFU (Issued for Use)		WTJ	HNJ	WTJ	BLUE LOGIC This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission	Dwg Scale: NTS	Dwg Proj:	Drawing title: Ø35 SP Rec 10k Interv wCV BSP 1/2" ID8mm	
02	25.4.2014	9-IFU (Issued for Use)		WTJ	HNJ	WTJ		Dwg Format: A3			
01	3.10.2011	Issued for Construction		LGH	N/A	N/A					
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.				Drawing number: BA1071	Rev. 03