
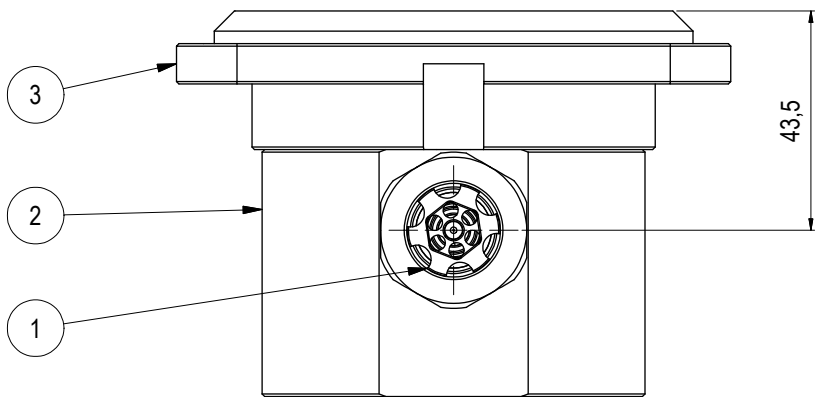


Parts List			
ITEM	QTY	PART No.	DESCRIPTION
1	1	PA0088	2-Way Check Valve
2	1	BA1045	SP. Ø35mm Receptacle
3	1	BA1044	Adapter Plate with Lock Interface Ø35 10k
4	6	100363	M6x20 Socket Head Bolt DIN 912 A4-80

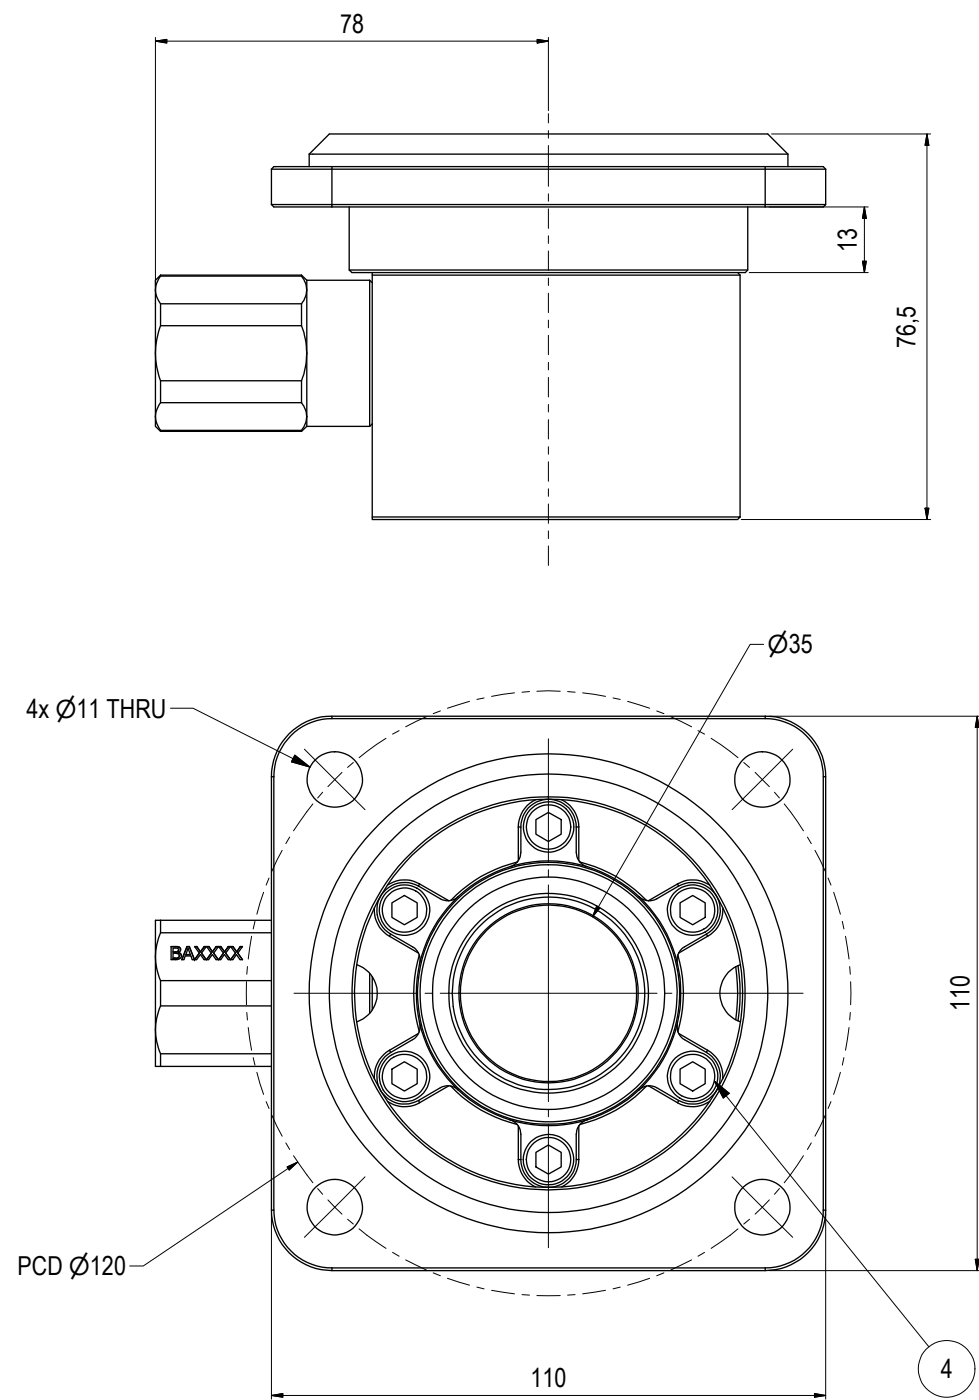

NOTE: 1
DESIGN CODE:
API 17H/6A


NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.01. Ø35 Hot Stab
Intermediate Group: 1.1.02. Receptacle
Sub Group: 1.1.2.01. Single

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth:
Material: Intervention
Weight in Air: 2,4 kg
Volume: 0,31 dm³
Submerged Weight: 2,11 kg
Surface Area: 852 cm²
Hydraulic: 1/2" BSP
Mechanical: 4x Ø11 PCD 120
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
SPAREPARTS:
BA5287

NOTE: 5
ADDITIONAL INFORMATION:
The Ø35mm Blue Logic Hot Stab is made according to API 17H. This Hot Stab is in general designed for flow up to approx 25 liters pr. minute. We have pressure rating up to PSI 20K or 1380 Bar. The Hot Stab system can also be fitted with an lock-system.

Other hydraulic port interface can be delivered on customers request.

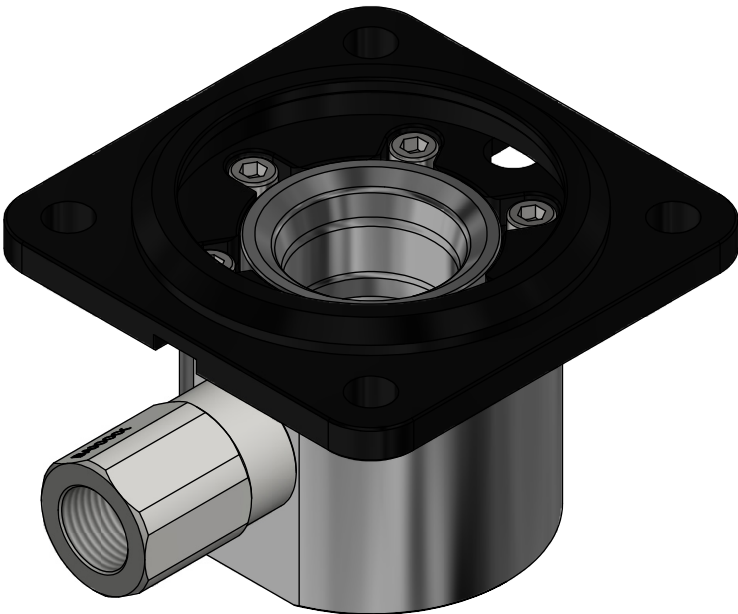

03	2.10.2025	9-IFU (Issued for Use)		WTJ	HNJ	WTJ	BLUE LOGIC This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission	Dwg Scale: NTS	Drawing title: Ø35 SP Rec 10k Interv wCV WL BSP 1/2"	Drawing number: BA1847		Rev. 03
02	23.4.2025	9-IFU (Issued for Use)		HNJ	TAN	HNJ		Dwg Proj: NTS				
01	13.10.2020	9-IFU (Issued for Use)		LGH	HNJ	LGH		Dwg Format: A3				
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.						