
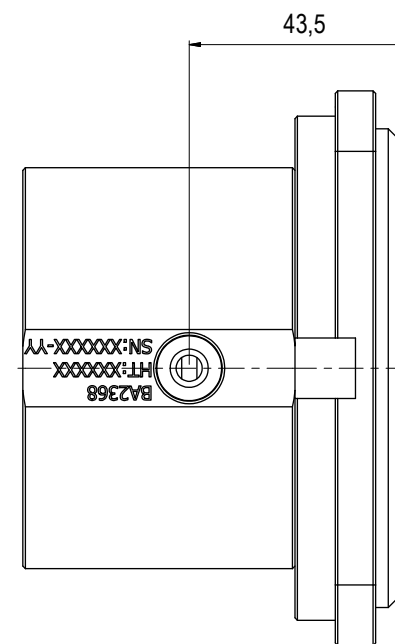
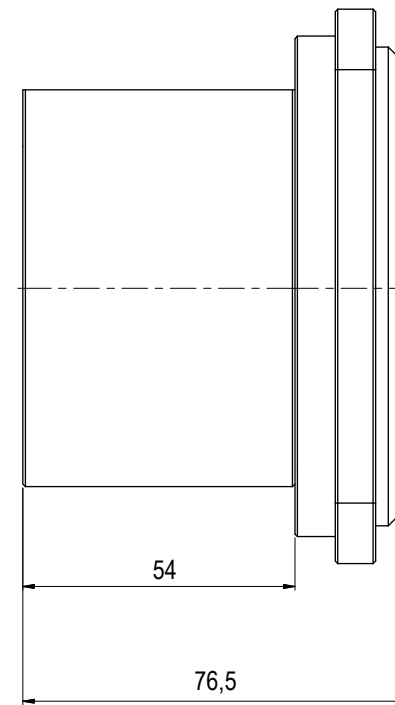


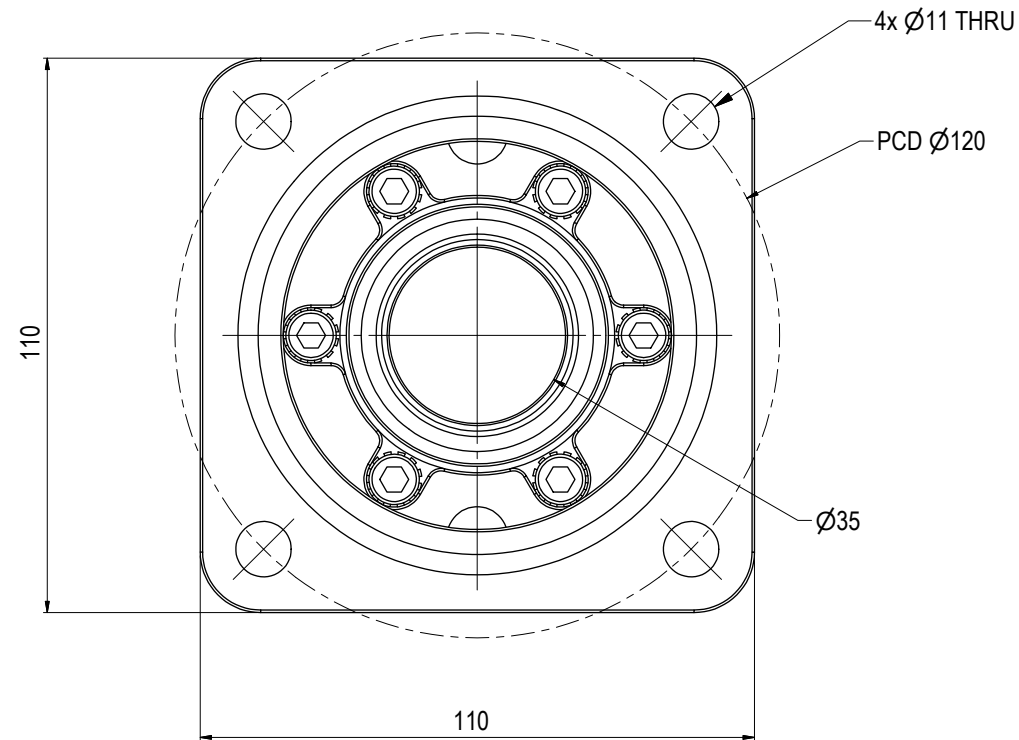

NOTE: 1

DESIGN CODE:
API 17H/6A

NOTE: 2

TECHNICAL CLASSIFICATION:

Article Type: 001-Hot Stabs
Main Group: 1.01. Ø35 Hot Stab
Intermediate Group: 1.1.02. Receptacle
Sub Group: 1.1.2.01. Single

NOTE: 3

INTERFACE INFORMATION:

Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Long-term
Weight: 2,6 kg
Volume: 0,33 dm³
Submerged Weight: 2,27 kg
Surface Area: 703 cm²
Hydraulic: 3/8" MP
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4

SPAREPARTS:
BA5287

NOTE: 5

ADDITIONAL INFORMATION:

The Ø35mm Blue Logic Hot Stab is made according to API 17H. This Hot Stab is in general designed for flow up to approx 25 liters pr. munute. We have pressure rating up to PSI 20K or 1380 Bar. The Hot Stab system can also be fitted with an lock-system.

Other hydraulic port interface can be delivered on customers request.



Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.
04	25.4.2014	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
02	11.7.2012	Issued for Information		LGH	HNJ	LGH

BLUE LOGIC

This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission

Dwg Scale:
NTS
Dwg Proj:
Dwg Format:
A3

Drawing title:
Ø35 SP Rec 10k Long-term WL MP 3/8"

Drawing number:
BA2369

Rev.
04