
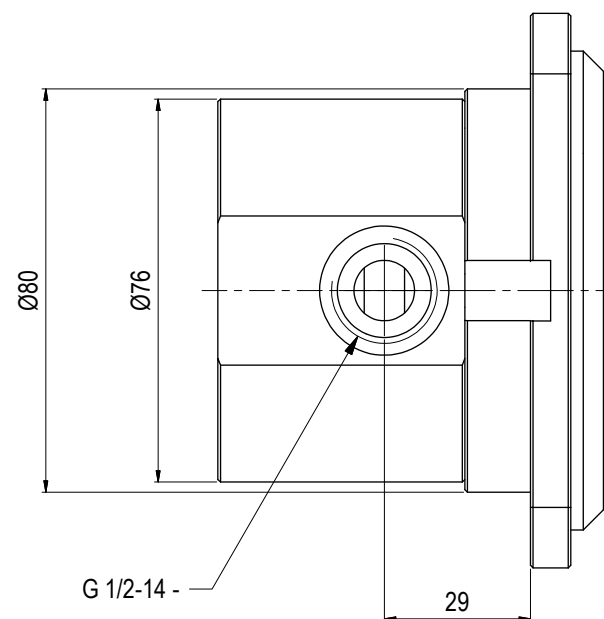


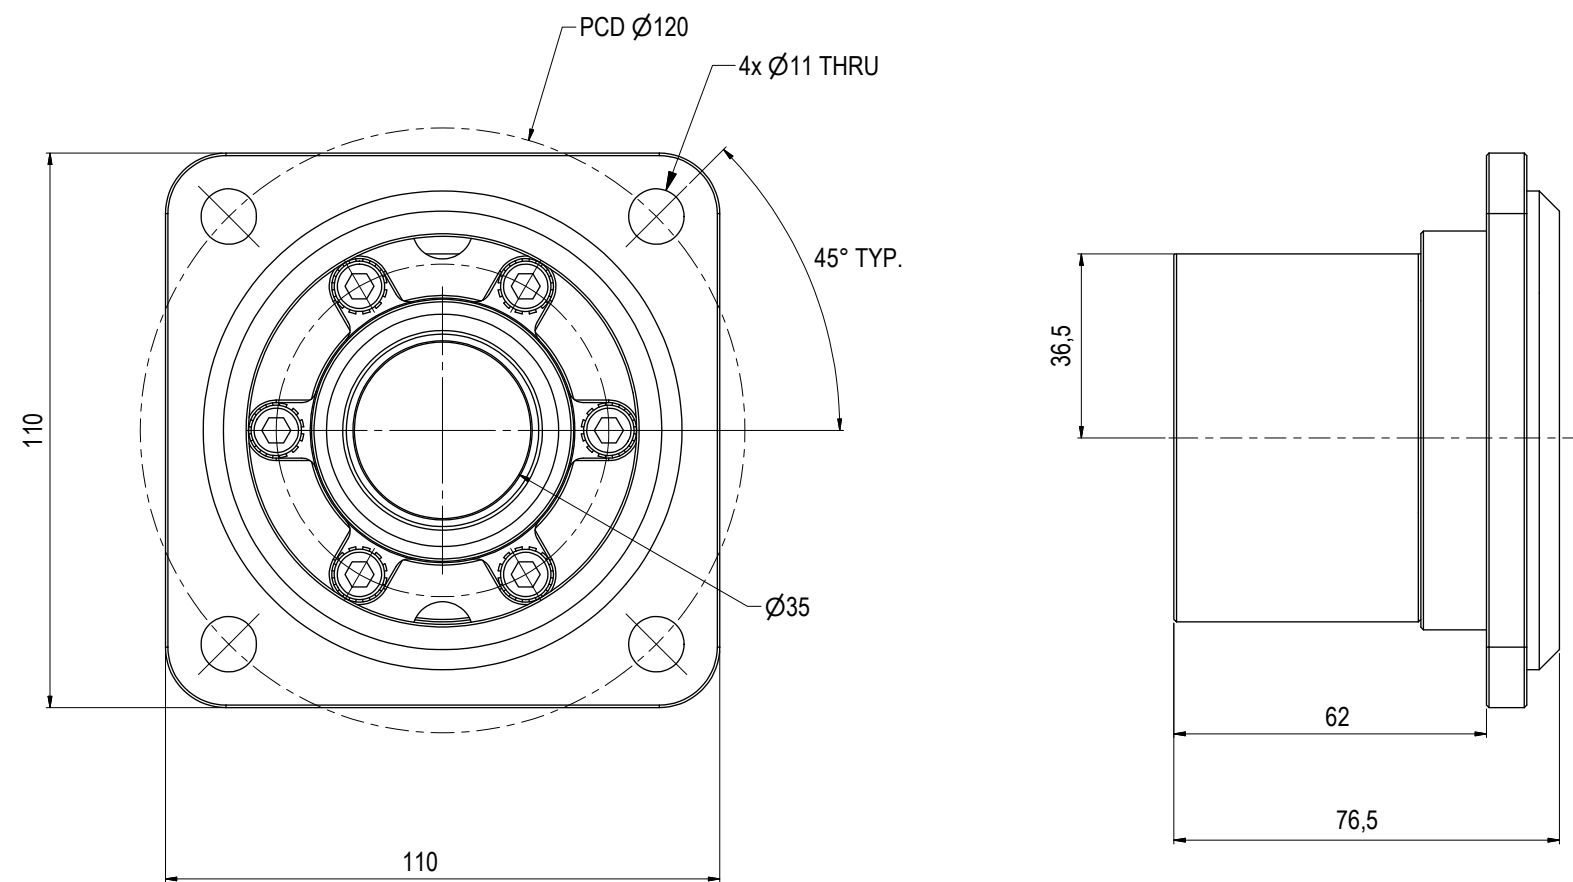

NOTE: 1
DESIGN CODE:
API 17H/6A

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.01. Ø35 Hot Stab
Intermediate Group: 1.1.02. Receptacle
Sub Group: 1.1.2.01. Single

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Intervention
Weight: 2,2 kg
Volume: 0,29 dm³
Submerged Weight: 1,95 kg
Surface Area: 713 cm²
Hydraulic: BSP 1/2"
Mechanical: 4x Ø11@PCD 120
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
SPAREPARTS:
BA5287

NOTE: 5
ADDITIONAL INFORMATION:
The Ø35mm Blue Logic Hot Stab is made according to API 17H Type 1.
This Hot Stab is in general designed for flow up to approx 25 liters pr.
minute. We have pressure rating up to PSI 20K or 1380 Bar. The Hot
Stab system can also be fitted with an lock-system.

Other hydraulic port interface can be delivered on customers request.



03	2.10.2025	9-IFU (Issued for Use)		WTJ	HNJ	WTJ	BLUE LOGIC This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission	Dwg Scale: NTS		Drawing title: Ø35 SP Rec 10k Interv WL BSP 1/2"	Drawing number: BA8211	Rev. 03
02	5.10.2020	9-IFU (Issued for Use)		WTJ	HNJ	WTJ		Dwg Proj:				
01	24.2.2016	2-IFT (Issued for Tender)		HNJ	N/A	N/A		Dwg Format: A3				
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.						