


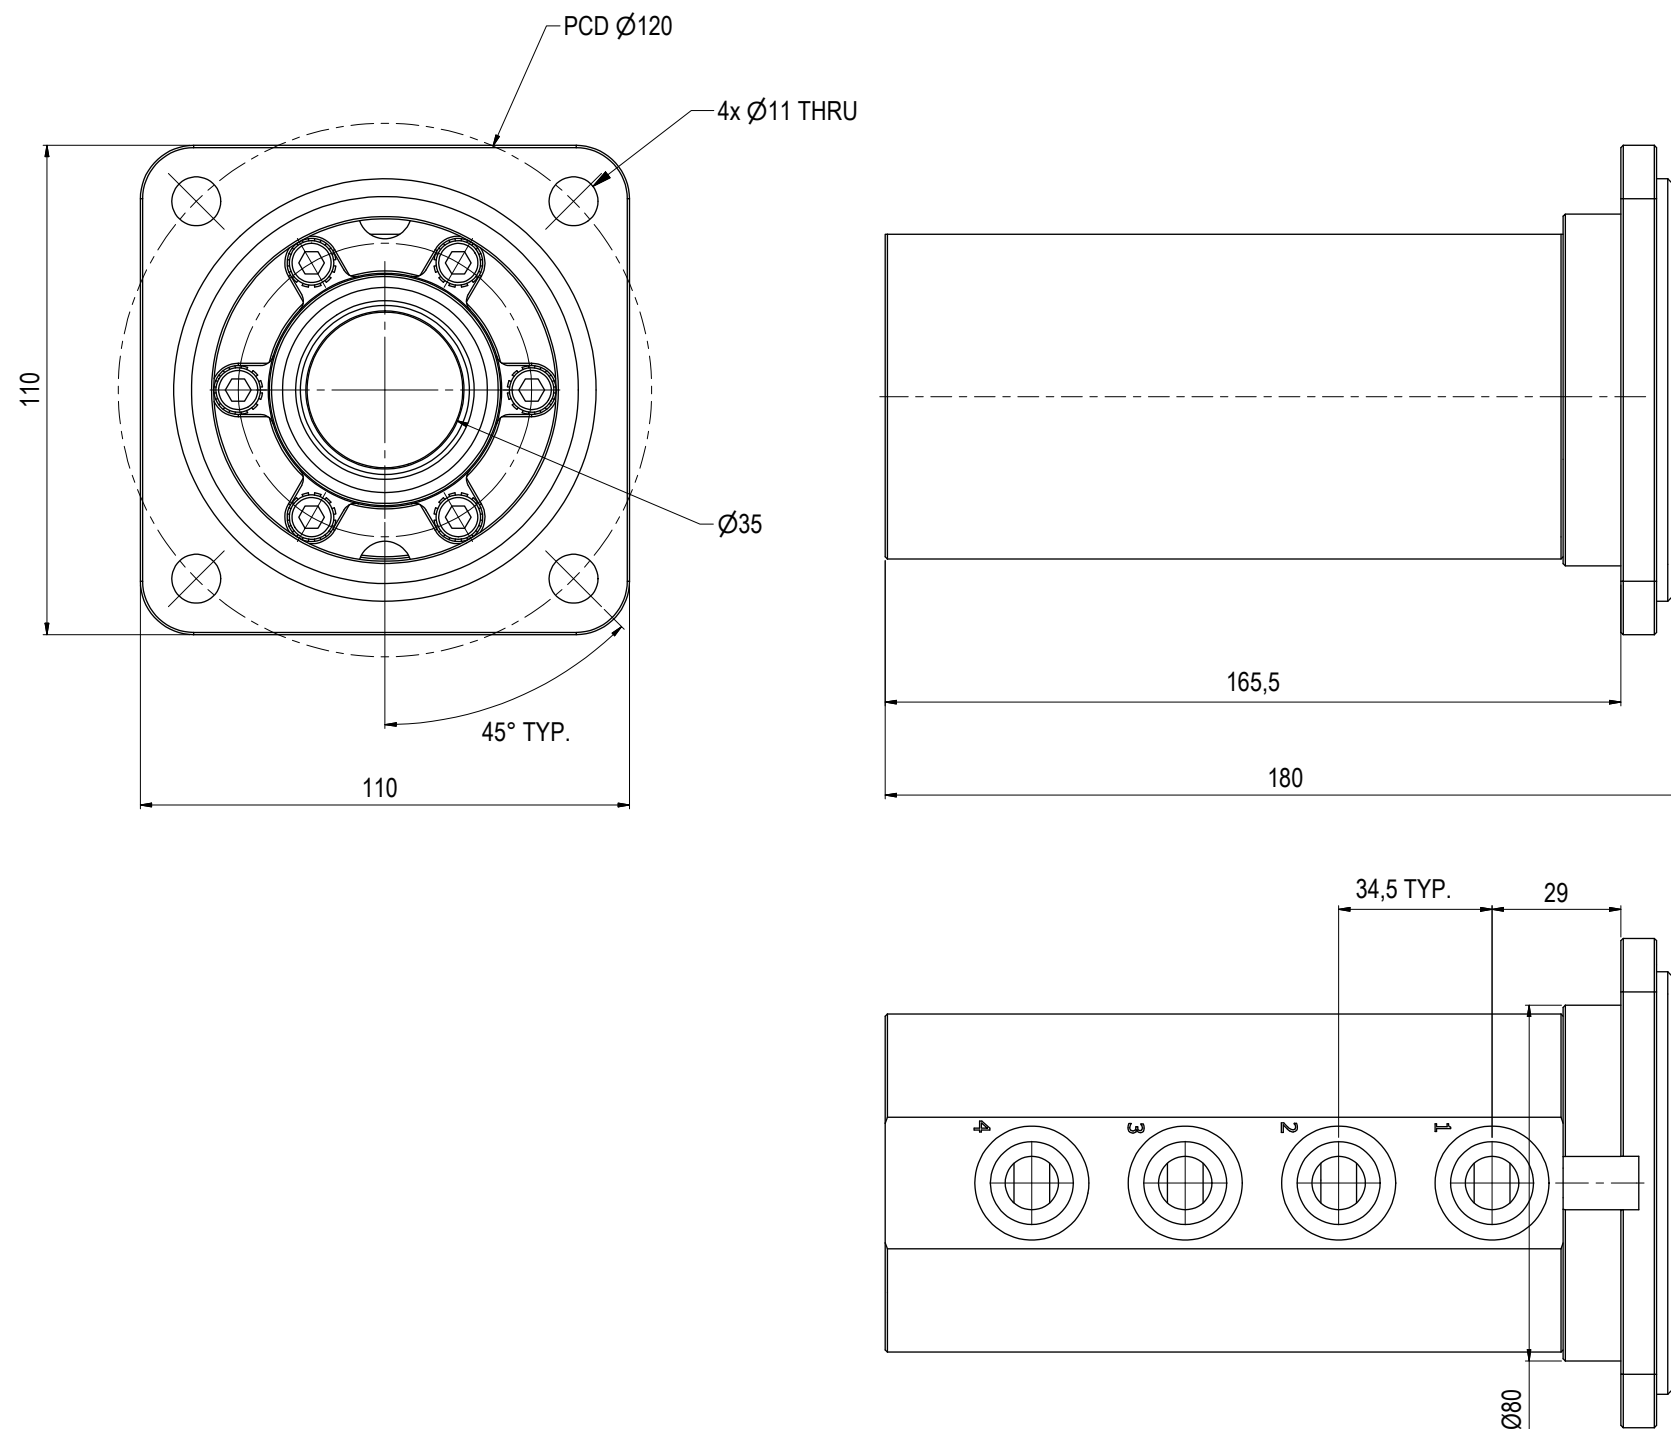

NOTE: 1

DESIGN CODE:

API 17H/6A

NOTE: 2

TECHNICAL CLASSIFICATION:

Article Type: 001-Hot Stabs

Main Group: 1.01. Ø35 Hot Stab

Intermediate Group: 1.1.02. Receptacle

Sub Group: 1.1.2.04. Quad

NOTE: 3

INTERFACE INFORMATION:

Pressure Rating Bar: 690

Design Water Depth: N/A

Material: Intervention

Weight: 4,9 kg

Volume: 0,62 dm³

Submerged Weight: 4,26 kg

Surface Area: 1105 cm²

Hydraulic: BSP 1/2"

Mechanical: 4xØ11@PCD 120

Electrical: N/A

Com. & Protocol: N/A

NOTE: 4

SPAREPARTS:

BA5287

NOTE: 5

ADDITIONAL INFORMATION:

The Ø35mm Blue Logic Hot Stab is made according to API 17H. This Hot Stab is in general designed for flow up to approx 25 liters pr. minute. We have pressure rating up to PSI 20K or 1380 Bar. The Hot Stab system can also be fitted with an lock-system.

Other hydraulic port interface can be delivered on customers request.



Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.
03	2.10.2025	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
02	15.12.2016	9-IFU (Issued for Use)		WTJ	LAE	HNJ
01	24.2.2016	2-IFT (Issued for Tender)		HNJ	NA	NA

BLUE LOGIC

This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission

Dwg Scale:
NTS
Dwg Proj:
Dwg Format:
A3

Drawing title:
Ø35 QP Rec 10k Interv WL BSP 1/2"

Drawing number:
BA8213

Rev.
03