
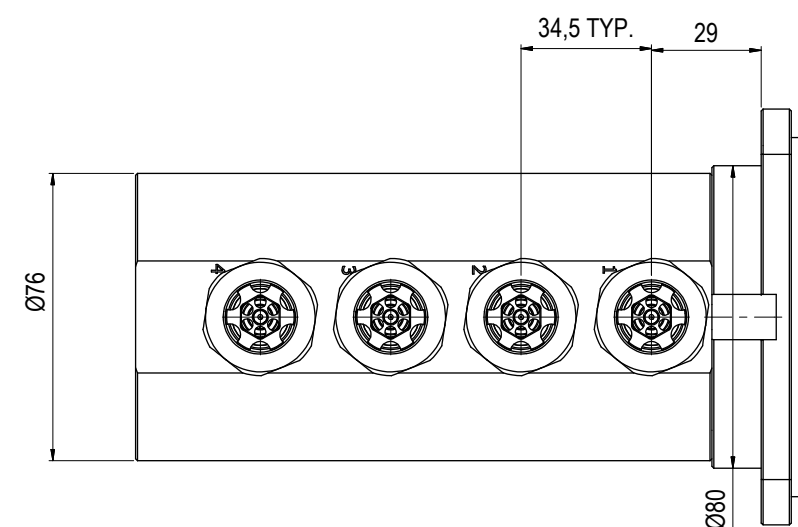


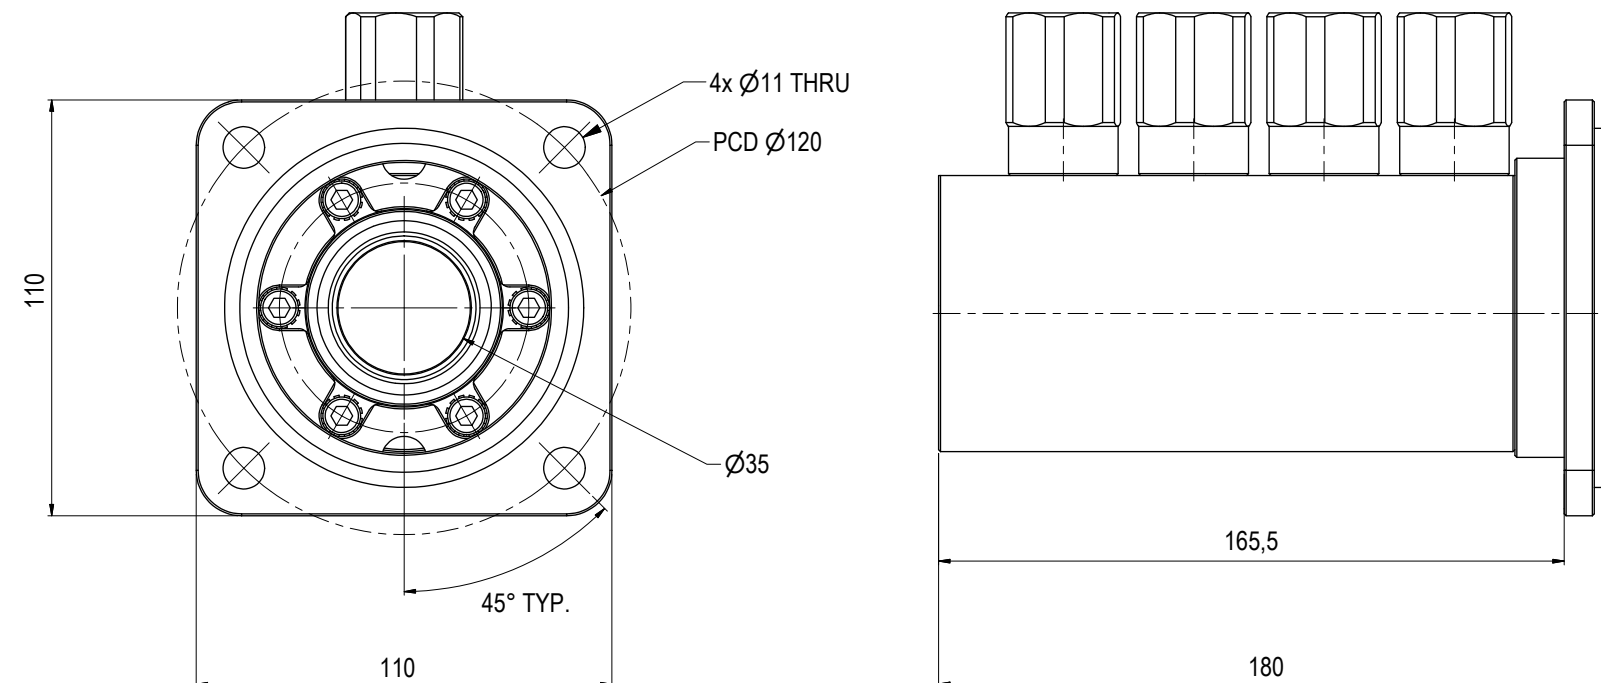

NOTE: 1
 DESIGN CODE:
 Interface: API 17D
 Material/Testing: API 6A/NORSOK MDS D57

NOTE: 2
 TECHNICAL CLASSIFICATION:
 Article Type: 001-Hot Stabs
 Main Group: 1.01. $\varnothing 35$ Hot Stab
 Intermediate Group: 1.1.02. Receptacle
 Sub Group: 1.1.2.04. Quad

NOTE: 3
 INTERFACE INFORMATION:
 Pressure Rating Bar: 690
 Design Water Depth: N/A
 Material: Intervention
 Weight: 5,7 kg
 Volume: 0,73 dm³
 Submerged Weight: 4,93 kg
 Surface Area: 1696 cm²
 Hydraulic: BSP 1/2"
 Mechanical: 4x $\varnothing 11$ @PCD 120
 Electrical: N/A
 Com. & Protocol: N/A

NOTE: 4
 SPAREPARTS:
 BA5287

NOTE: 5
 ADDITIONAL INFORMATION:
 The $\varnothing 35$ mm Blue Logic Hot Stab is made according to API 17H. This Hot Stab is in general designed for flow up to approx 25 liters pr. minute. We have pressure rating up to PSI 20K or 1380 Bar. The Hot Stab system can also be fitted with an lock-system.

Other hydraulic port interface can be delivered on customers request.



Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.
02	2.10.2025	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
01	18.12.2019	9-IFU (Issued for Use)		WTJ	LGH	WTJ

BLUE LOGIC

Dwg Scale:
 NTS
 Dwg Proj:
 Dwg Format:
 A3

Drawing title:
 $\varnothing 35$ QP Rec 10k Interv wCV WL BSP 1/2"

Drawing number:
 BB4160

Rev.
 02