
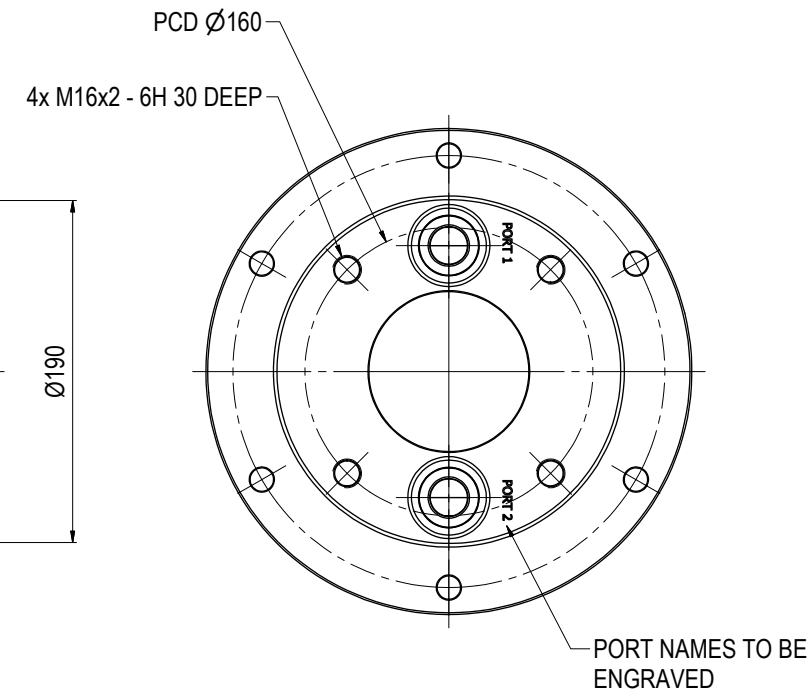
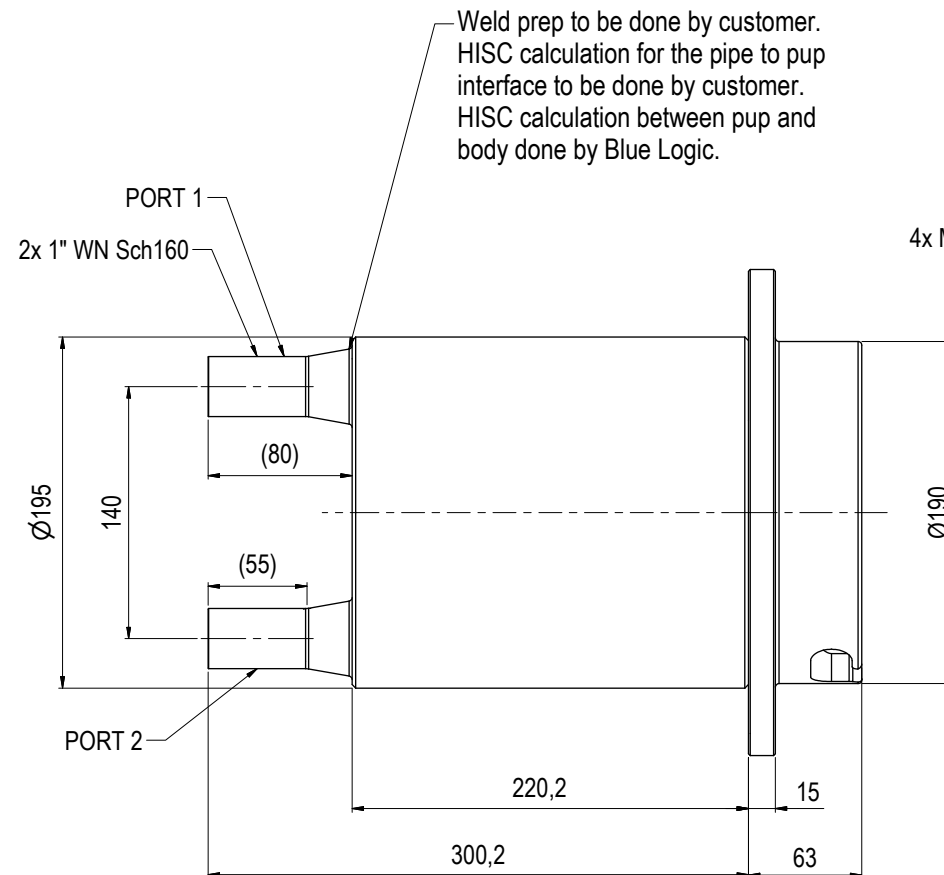


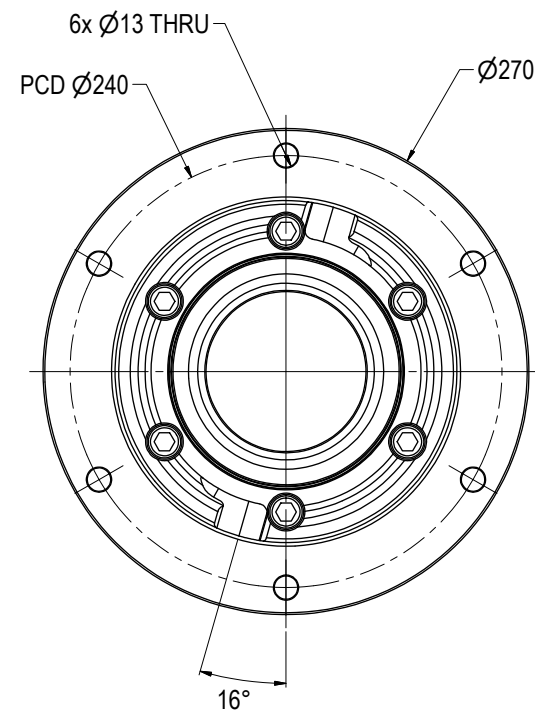

NOTE: 1
DESIGN CODE:
API 17H Type 3

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.10. Ø89 Hot Stab
Intermediate Group: 1.89.02. Receptacle
Sub Group: 1.89.423.02. Dual

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Long-term
Weight in Air: 49,3 kg
Volume: 6,27 dm³
Submerged Weight: 42,82 kg
Surface Area: 4985 cm²
Hydraulic: 1" WN Sch 160
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A


NOTE 4
NON SPECIFIED TOLERANCES TO BE IN
ACCORDANCE WITH NS-ISO 2768-1M

0,5-3mm	± 0,1
3-6mm	± 0,1
6-30mm	± 0,2
30-120mm	± 0,3
120-400mm	± 0,5
400-1000mm	± 0,8
1000-2000mm	± 1,2
2000-4000mm	± 2,0

NOTE 5
RECEPTACLE TO BE CONNECTED TO CP SYSTEM

NOTE: 6
ADDITIONAL INFORMATION:
Ø89 Dual Port Receptacle designed according to API 17H Type 3 in Super Duplex (S32760) material suitable for permanent installation. The Receptacle is pressure rated to 690 Bar / 10 000 Psi. Integrated J-lock to lock the Stab in position.

NOTE: 7
OPERATION & MAINTENANCE INFORMATION:
600189-TD-0002

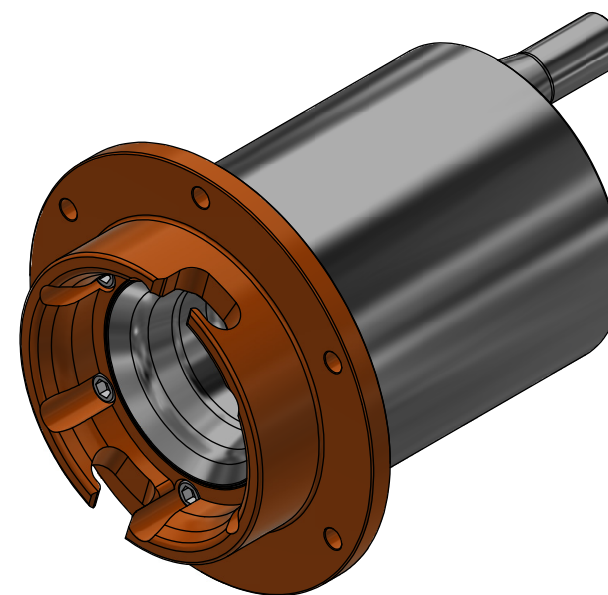

09	4.6.2024	9-IFU (Issued for Use)		HNJ	PIA	HNJ
08	16.5.2022	7-IFC (Issued for Construction)		WTJ	PIA	HNJ
07	18.2.2022	7-IFC (Issued for Construction)		HNJ	TAN	HNJ
06	21.12.2021	7-IFC (Issued for Construction)		WTJ	LGH	HNJ
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.