


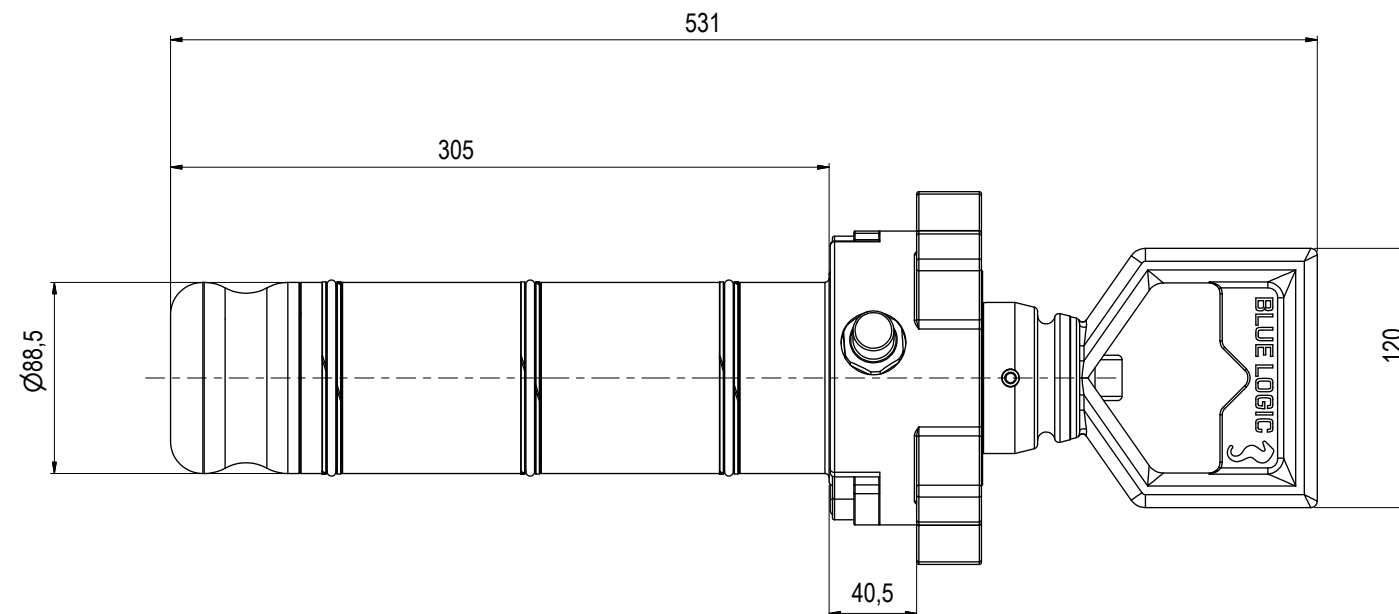

NOTE: 1
DESIGN CODE:
API 17H Type 3

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.10. Ø89 Hot Stab
Intermediate Group: 1.89.04. Pressure
Sub Group: 1.89.425.02. Dual





NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Long-term
Weight in Air: 20,2 kg
Volume: 2,85 dm³
Submerged Weight: 17,25 kg
Surface Area: 4223 cm²
Hydraulic: N/A
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE 4
NON SPECIFIED TOLERANCES TO BE IN
ACCORDANCE WITH NS-ISO 2768-1M

0,5-3mm	± 0,1
3-6mm	± 0,1
6-30mm	± 0,2
30-120mm	± 0,3
120-400mm	± 0,5
400-1000mm	± 0,8
1000-2000mm	± 1,2
2000-4000mm	± 2,0

NOTE: 5
ADDITIONAL INFORMATION:
Ø89 Dual Port Pressure Stab (blind stab) designed according to API 17H Type 3. Fabricated in Super Duplex (32750) material with Xylan coating and intended for long-term subsea service. Integrated, manipulator-operated J-lock mechanism to lock the Stab into the Receptacle after connection. Additional lock included to prevent unintentional rotation after installation.
Stab nose in PEHD 1000 for gentle guiding of Stab into Receptacle. Seal material is RU15 (HNBR) with back up rings in PEEK.

NOTE: 6
OPERATION & MAINTENANCE INFORMATION:
OMM 500420-TD-0012

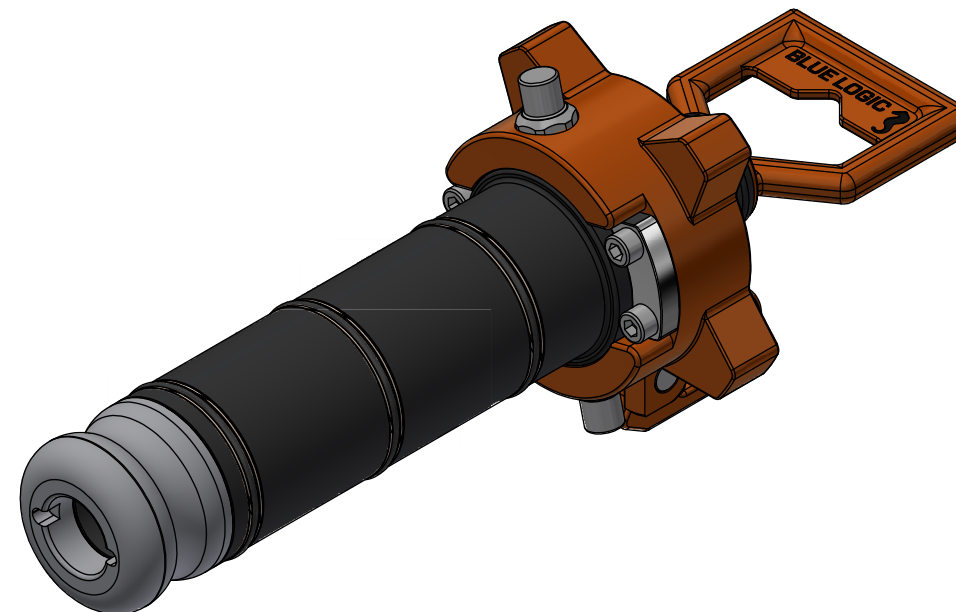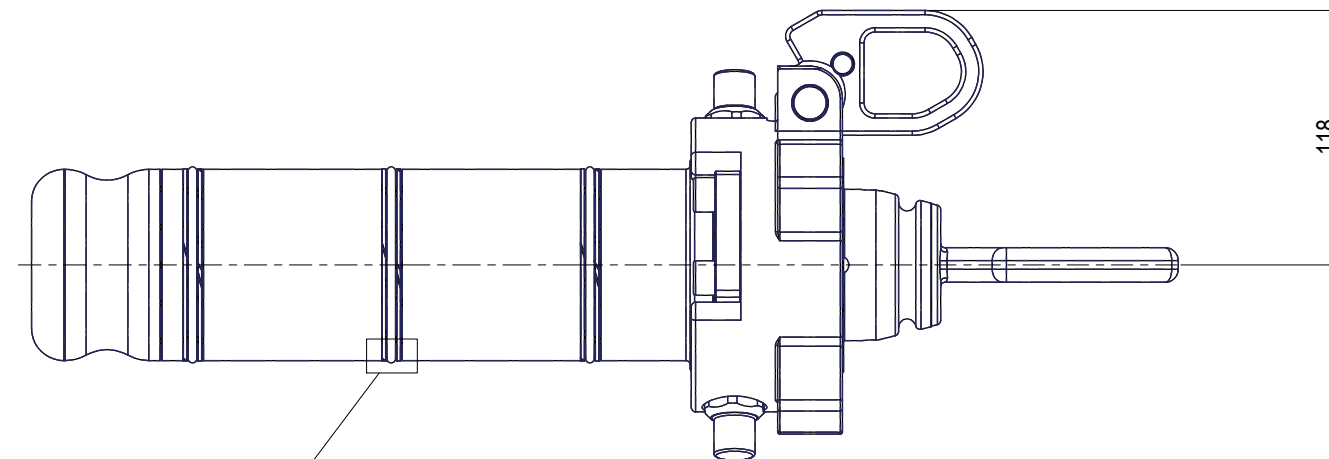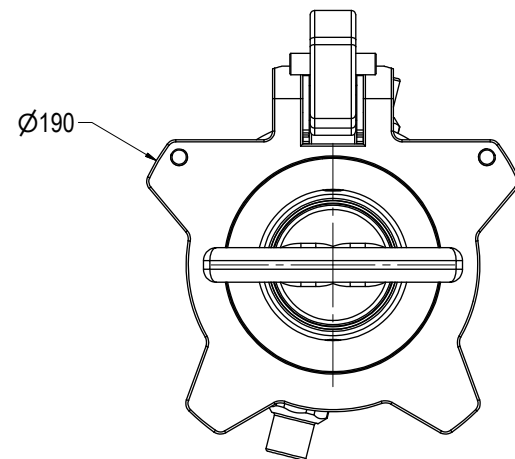

08	28.11.2023	9-IFU (Issued for Use)		HNJ	PIA	HNJ	BLUE LOGIC This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission	Dwg Scale: NTS	Drawing title: Ø89 DP Press Stab 10k Long-term wJ-Lock	Drawing number: BB6465	Rev. 08
07	17.2.2022	7-IFC (Issued for Construction)		HNJ	LGH	HNJ		Dwg Proj: 			
06	15.2.2022	7-IFC (Issued for Construction)		HNJ	LGH	HNJ		Dwg Format: A3			
05	10.1.2022	7-IFC (Issued for Construction)		HNJ	LGH	HNJ					
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.					