


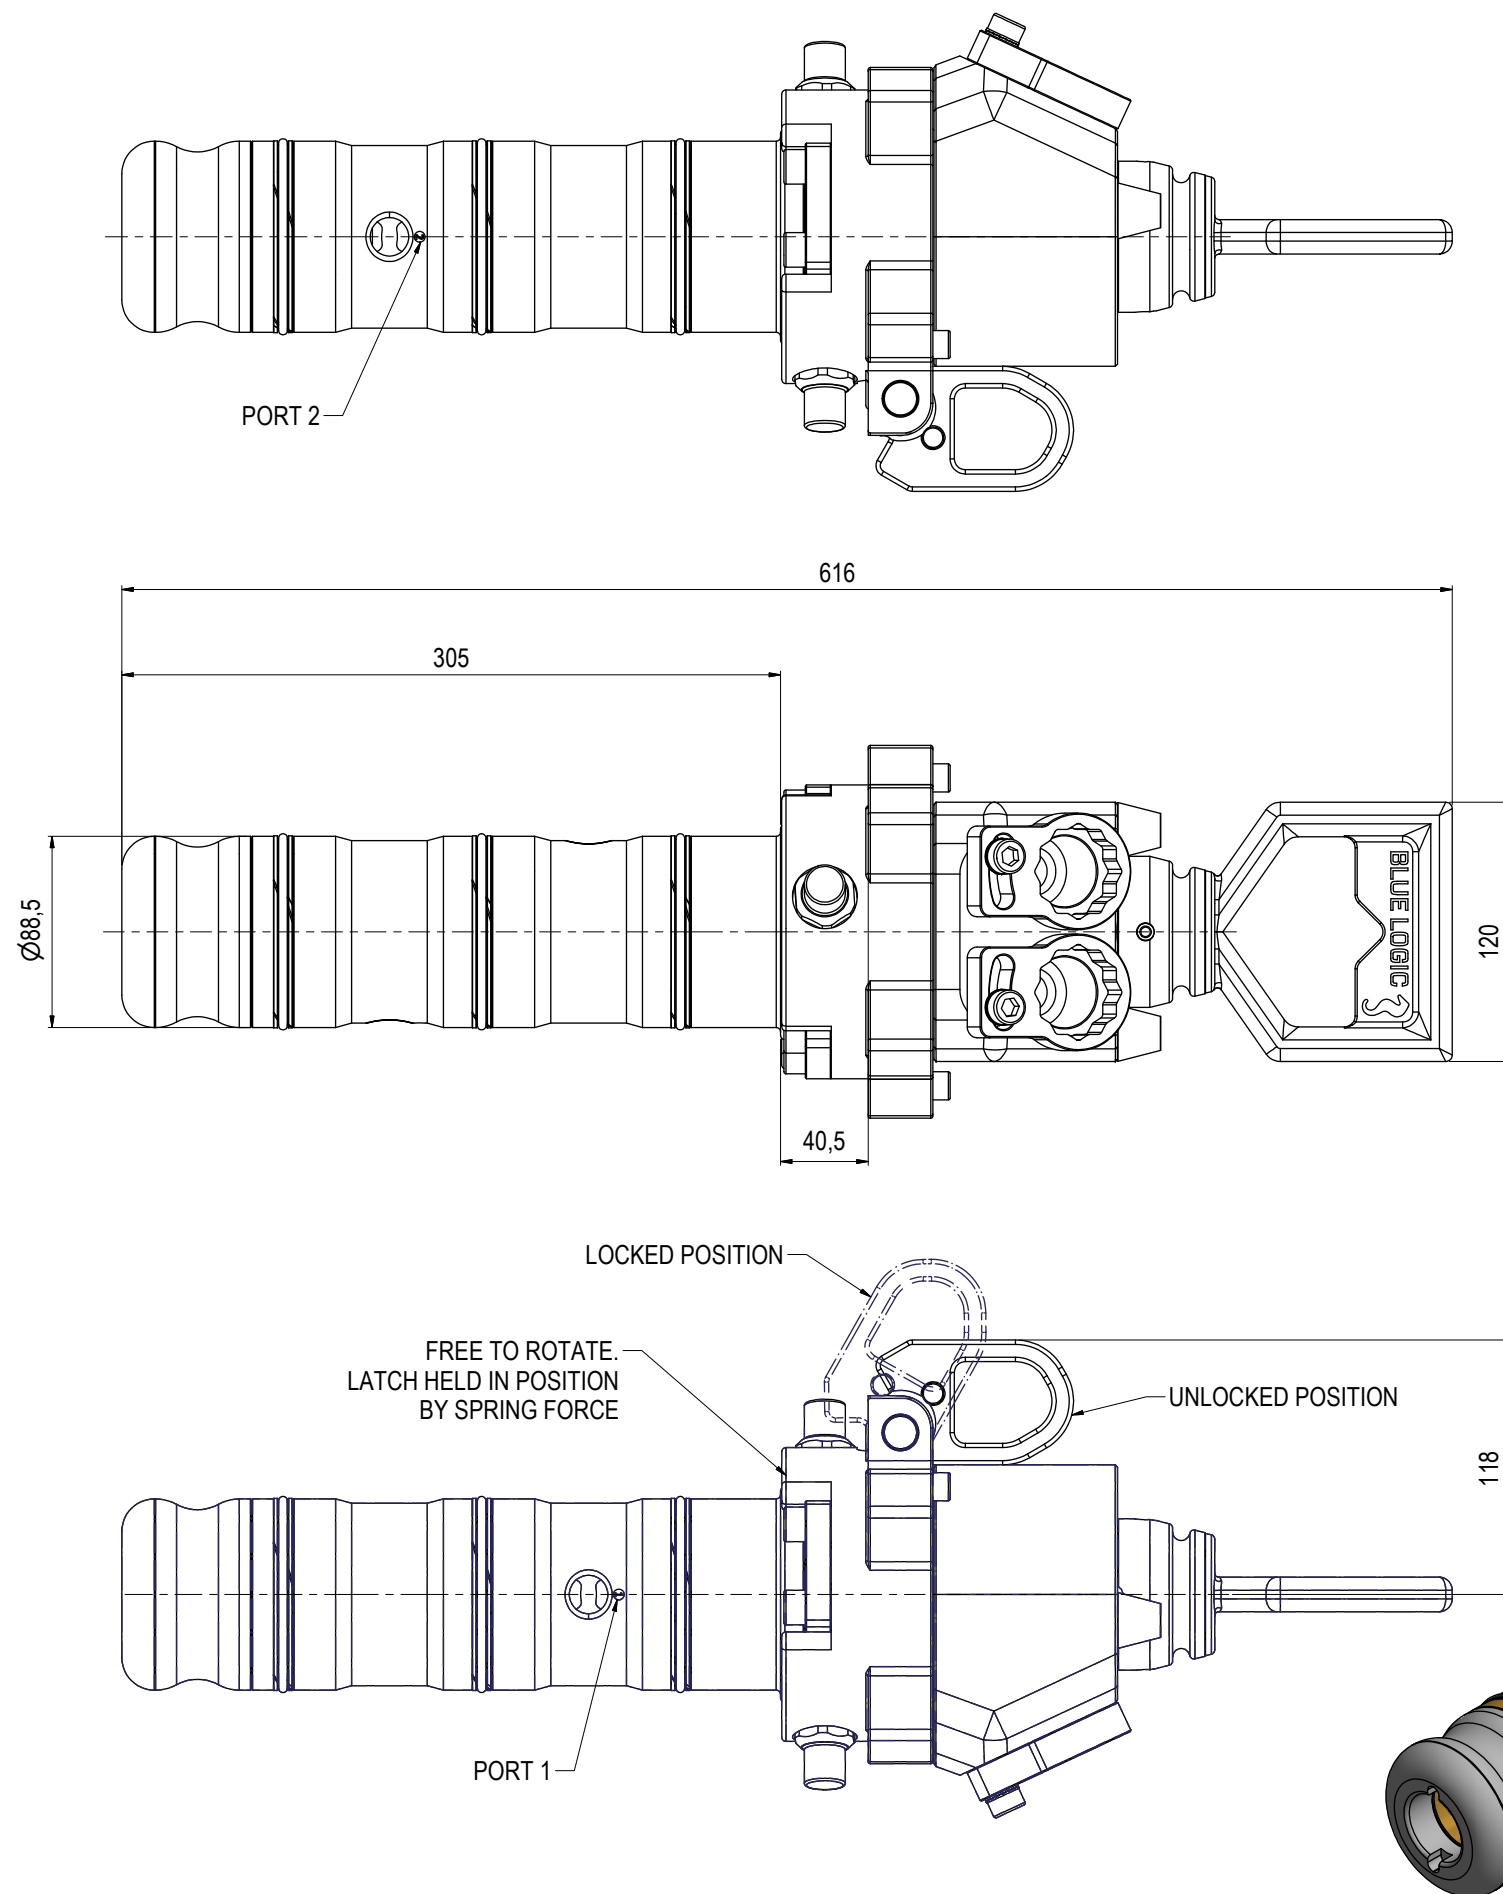


NOTE: 1
DESIGN CODE:
API 17H Type 3

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.10. Ø89 Hot Stab
Intermediate Group: 1.89.01. Stab
Sub Group: 1.89.422.02. Dual

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Intervention
Weight in Air: 33 kg
Volume: 4,14 dm³
Submerged Weight: 28,73 kg
Surface Area: 5970 cm²
Hydraulic: Autoclave 1" MP x2
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
Ø89 Dual Port Hot Stab designed according to API 17H Type 3.
Fabricated in UNSC63200 (OM7) material and intended for short-term subsea service. Hydraulic bore 2 x Ø17,8mm for excellent flow capacity. Integrated, manipulator-operated J-lock mechanism to lock the Stab into the Receptacle after connection. Additional lock included to prevent unintentional rotation after installation.
Stab nose in PEHD 1000 for gentle guiding of Stab into Receptacle. Seal material is RU15 (HNBR) with back up rings in PEEK.
Positive Gland Lock on hydraulic ports. Autoclave fitting shall have antivibration gland.
Available with different hose exit angles (15, 65 and 90 degrees)

NOTE: 5
OPERATION & MAINTENANCE INFORMATION:
OMM 500420-TD-0012

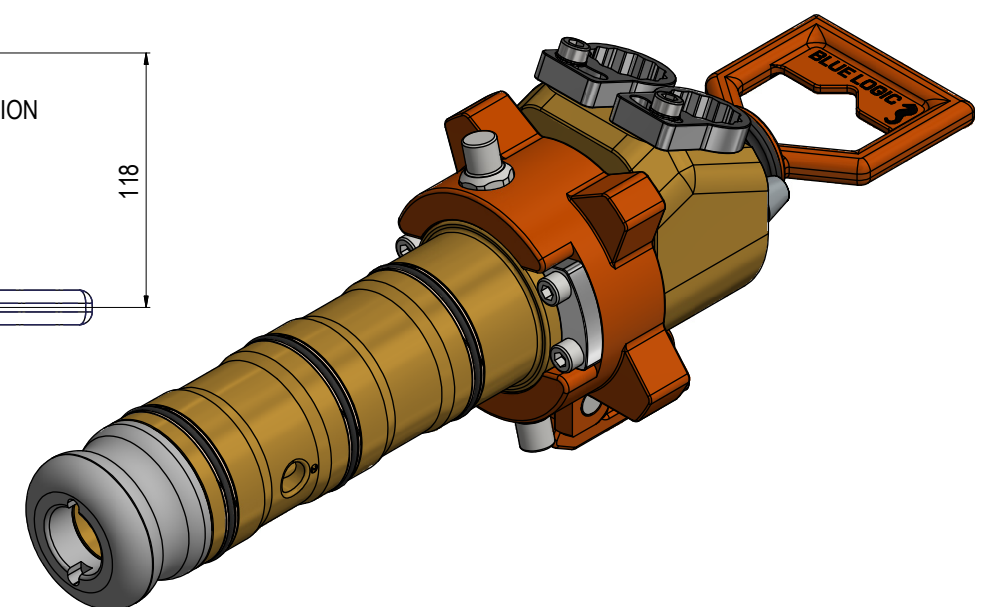

08	28.11.2023	7-IFC (Issued for Construction)		HNJ	PIA	HNJ
07	28.11.2022	7-IFC (Issued for Construction)		HNJ	TAN	HNJ
06	15.2.2022	7-IFC (Issued for Construction)		HNJ	LGH	HNJ
05	3.11.2021	7-IFC (Issued for Construction)		WTJ	HNJ	WTJ
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.

Dwg Scale: NTS	Drawing title: Ø89 DP Stab 10k Interv MP 1" 65 Deg Interf wJ-Lock
Dwg Proj: A3	
Dwg Format: A3	
Drawing number: BB6432	Rev: 08