

NOTE: 2

TECHNICAL CLASSIFICATION:

Article Type: 001-Hot Stabs

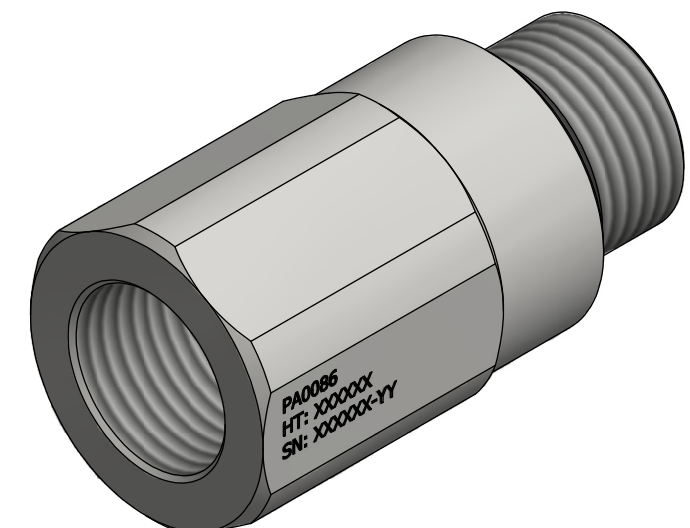
Main Group: 1.09. Valves Hot Stab

Intermediate Group: 1.6.02. 5-8mm

Sub Group: 1.6.22.02. 2-way

NOTE: 4
ADDITIONAL INFORMATION:
Opening Pressure Inlet Approx: 2,0 Bar
Opening Pressure Outlet Approx: 2,0 Bar

The check valves are designed with metal-to-metal sealing and are not 100% leak free.
A leak rate of 10 drops/min are acceptable.

[illegible]

BLUE LOGIC 

Dwg. Scale: NTS Dwg Proj:  Dwg Format: A3	Drawing title: 2-Way Check Valve 10k Interv BSP 1/2" - 2,0-2,0 Bar FM-M		
	Drawing number: BA1440		Rev: 03