

NOTE: 1
DESIGN CODE:
N/A



NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.09. Valves Hot Stab
Intermediate Group: 1.6.02. 5-8mm
Sub Group: 1.6.22.02. 2-way

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Material: Intervention
Weight: 0,2 kg
Volume: 0,03 dm^3
Surface Area: 142 cm^2
Hydraulic: 1/2" BSP
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
Opening Pressure Inlet Approx: 0,5 Bar
Opening Pressure Outlet Approx: 0,5 Bar

Only for Fluid

The check valves are designed with metal-to-metal sealing and are not 100% leak free.
A leak rate of 10 drops/min are acceptable.

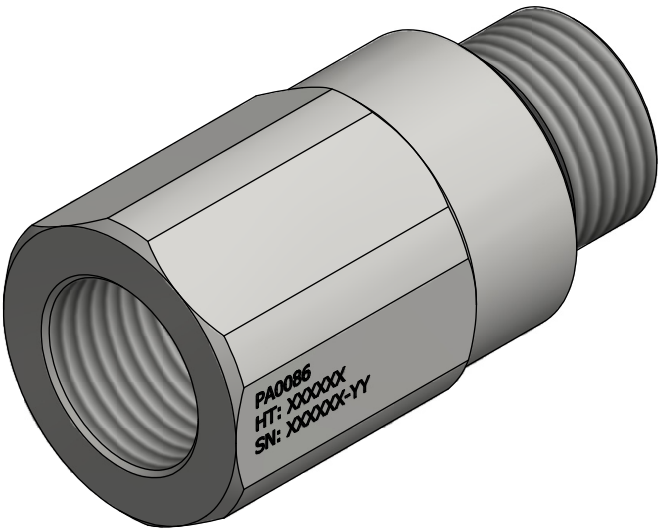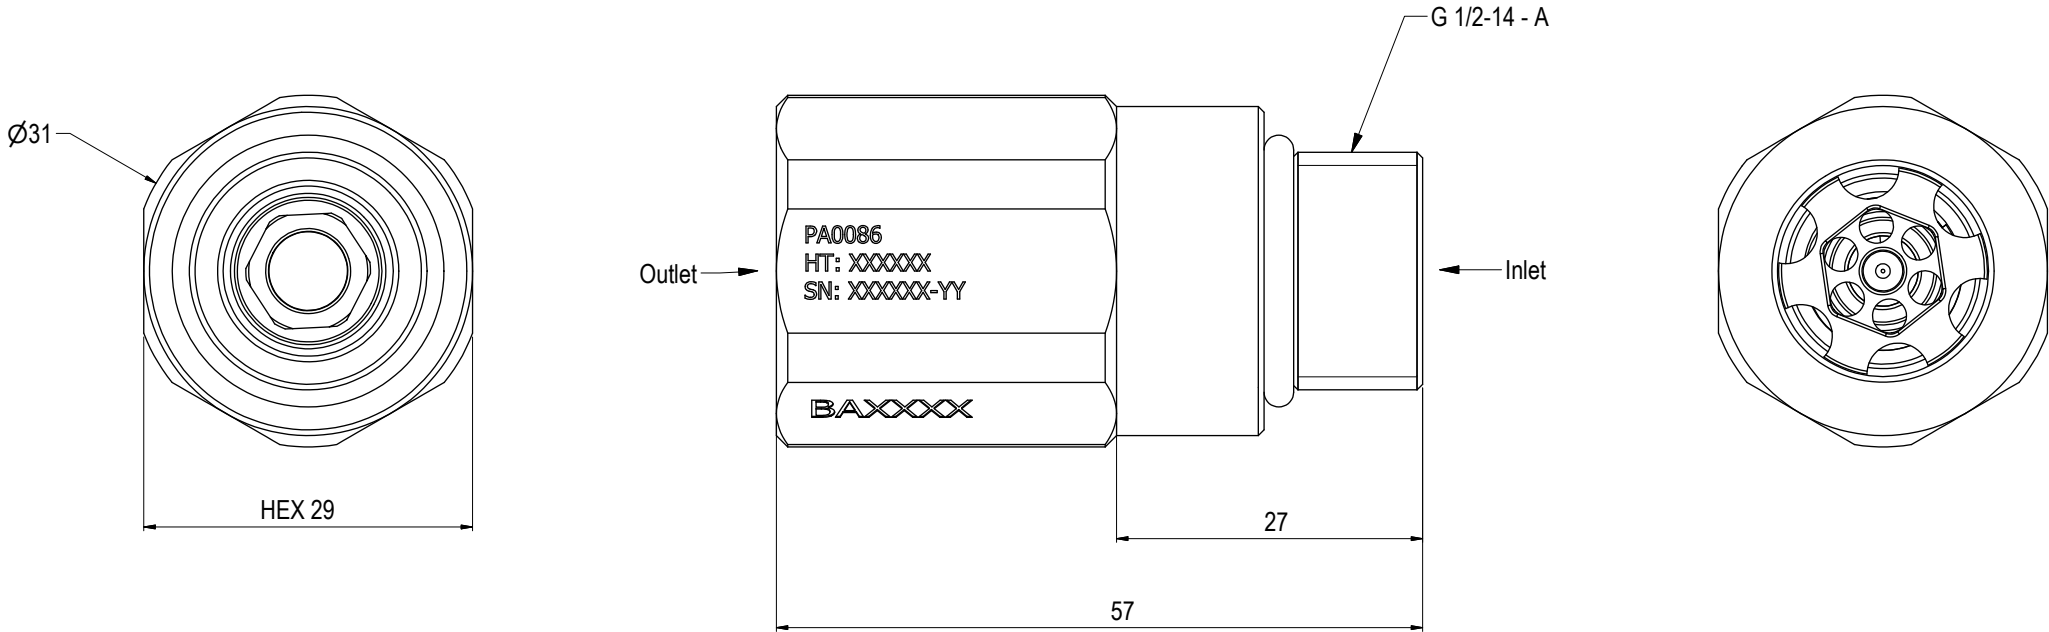

05	20.1.2022	9-IFU (Issued for Use)		HNJ	TAN	HNJ	BLUE LOGIC	Dwg Scale: NTS	Drawing title: 2-Way Check Valve 10k Interv BSP 1/2" - 0,5-0,5 Bar FM-M	Drawing number: BA1442	Rev. 05
04	16.12.2020	9-IFU (Issued for Use)		HNJ	LGH	HNJ		Dwg Proj: 			
03	17.2.2015	9-IFU (Issued for Use)		HNJ	LGH	HNJ		Dwg Format: A3			
02	26.8.2014	9-IFU (Issued for Use)		WTJ	HNJ	WTJ					
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.					