


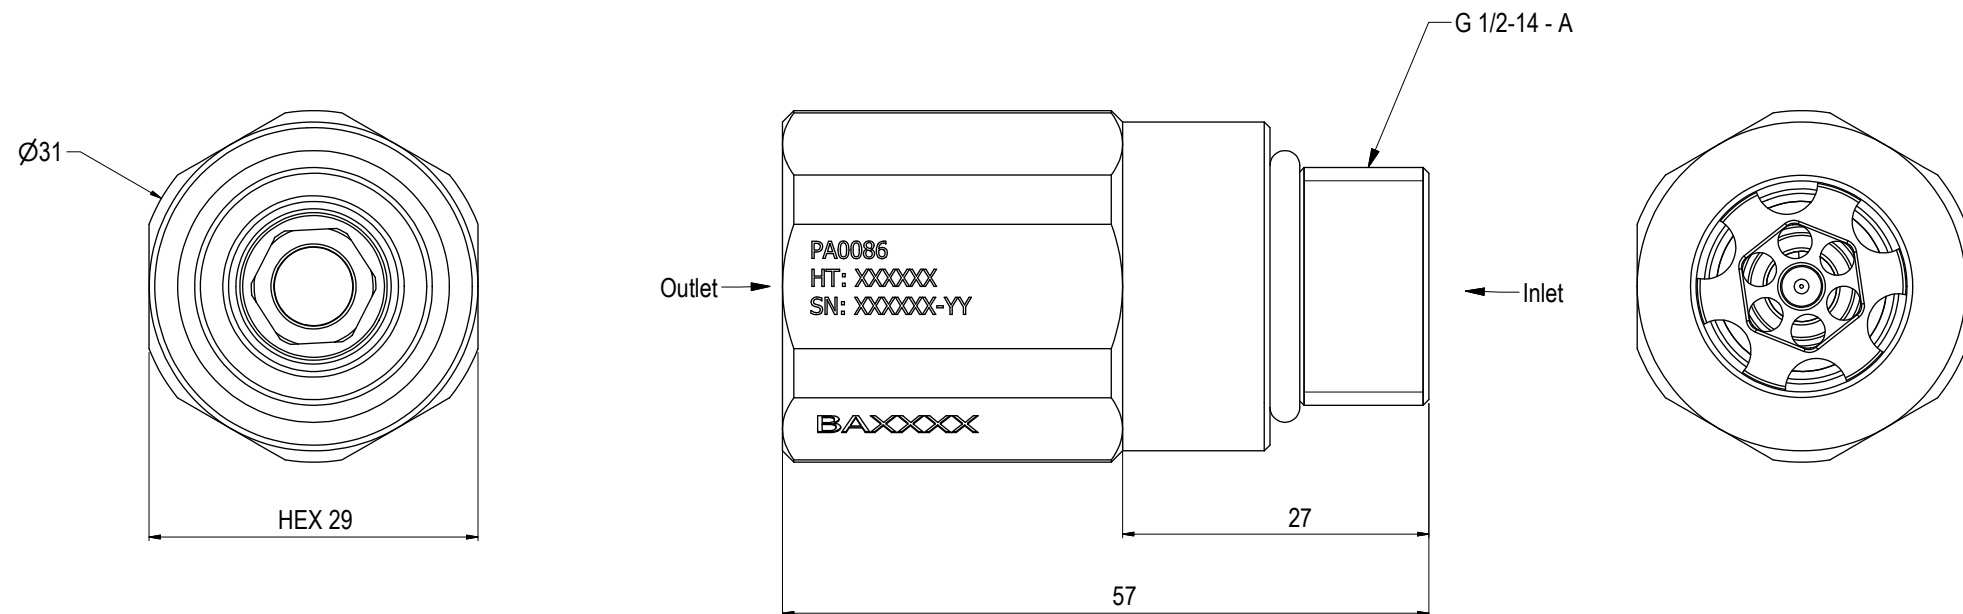

NOTE: 1
DESIGN CODE:
N/A


NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.09. Valves Hot Stab
Intermediate Group: 1.6.02. 5-8mm
Sub Group: 1.6.22.02. 2-way

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Material: Intervention
Weight: 0,2 kg
Volume: 0,03 dm³
Surface Area: 148 cm²
Hydraulic: 1/2" BSP
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
Opening Pressure Outlet Approx: 2,0 Bar
Opening Pressure Inlet Approx: 0,5 Bar

Only for Fluid

The check valves are designed with metal-to-metal sealing and are not 100% leak free.
A leak rate of 10 drops/min are acceptable.

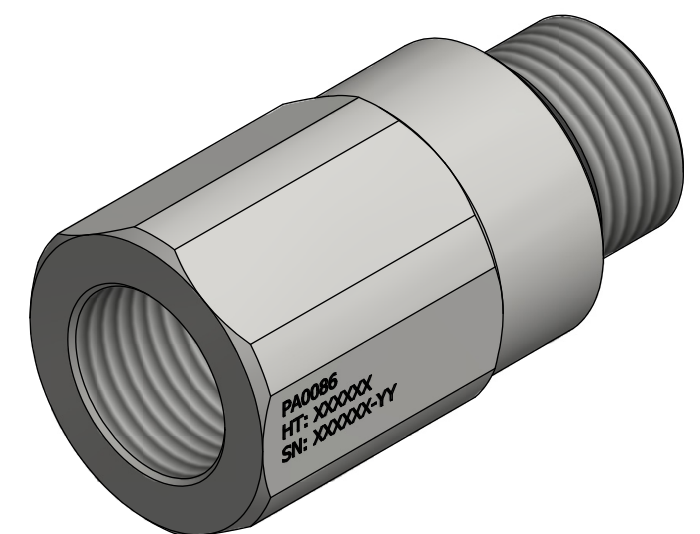

07	16.2.2015	9-IFU (Issued for Use)		HNJ	LGH	HNJ
06	26.8.2014	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
05	23.9.2011	3-IFI (Issued for Information)		LGH	NA	NA
04	9.2.2011	3-IFI (Issued for Information)		LGH	EKJ	LGH
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.