


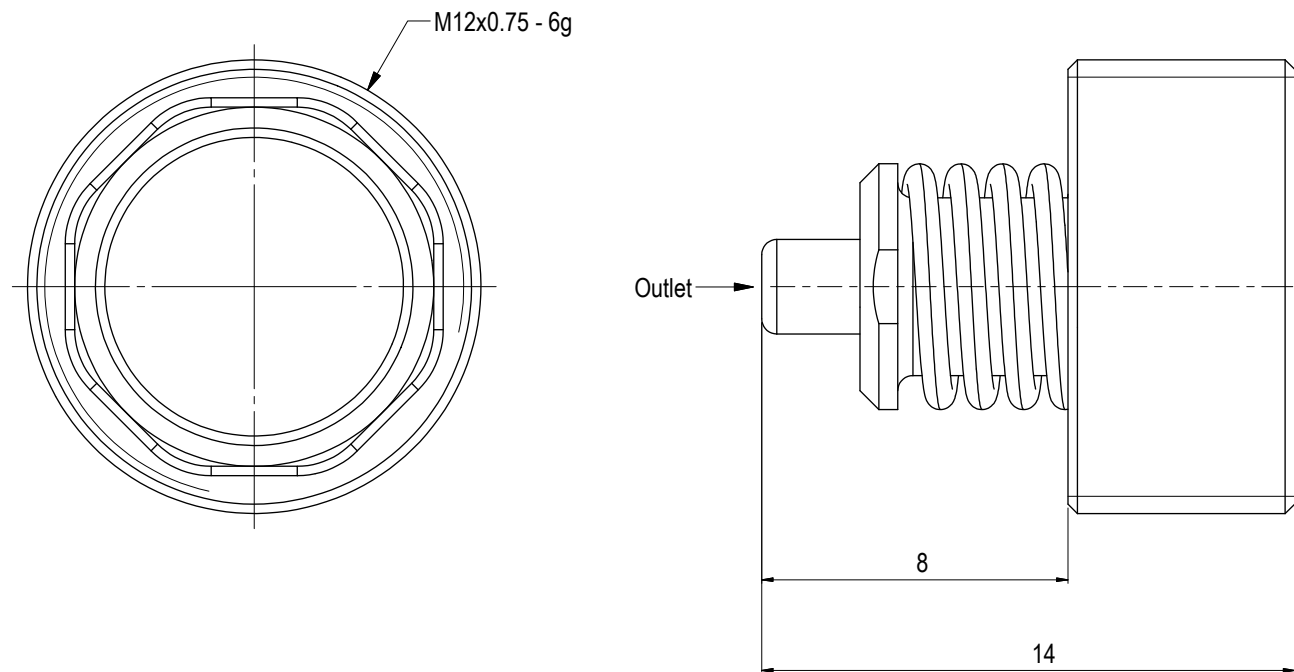


NOTE: 1
DESIGN CODE:
N/A

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.09. Valves Hot Stab
Intermediate Group: 1.6.02. 5-8mm
Sub Group: 1.6.22.01. 1-way

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 2
Material: Intervention
Weight: 0 kg
Volume: 0 dm^3
Surface Area: 13 cm^2
Hydraulic: M12x0,75
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
The check valves are designed with metal to metal sealing, and are not 100% leak free. A leak rate of 10 drops/minute are acceptable.
Cracking pressure approx. 2 Bar
In order to prevent jamming of Stab in Receptacle the threads has been inserted with Loctite.
Change of Valves is NOT recommended to be done Offshore without proper training.
Stabs to be returned to Blue Logic for service of Check Valves.

These valves will only fit on Blue Logic Hot Stabs
Not sold separately.

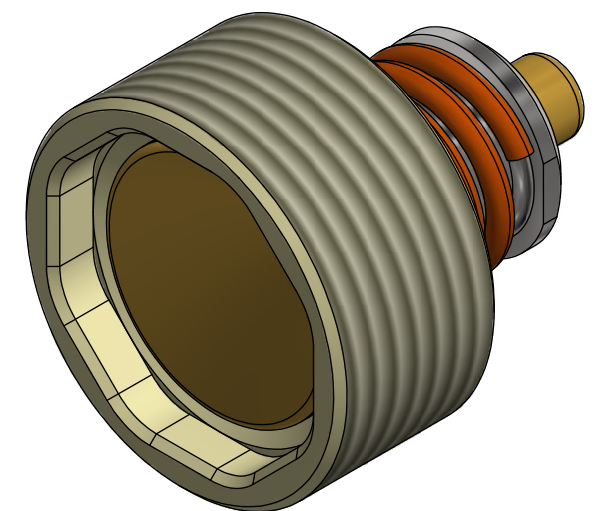

Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.
05	1.11.2021	9-IFU (Issued for Use)		WTJ	LGH	HNJ
04	19.10.2021	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
03	4.10.2011	Issued for construction		AAF	N/A	N/A



Dwg Scale: NTS	Drawing title: One Way Check Valve Outlet 2Bar
Dwg Proj: A3	
Dwg Format: A3	
Drawing number: PA0179	Rev. 05