
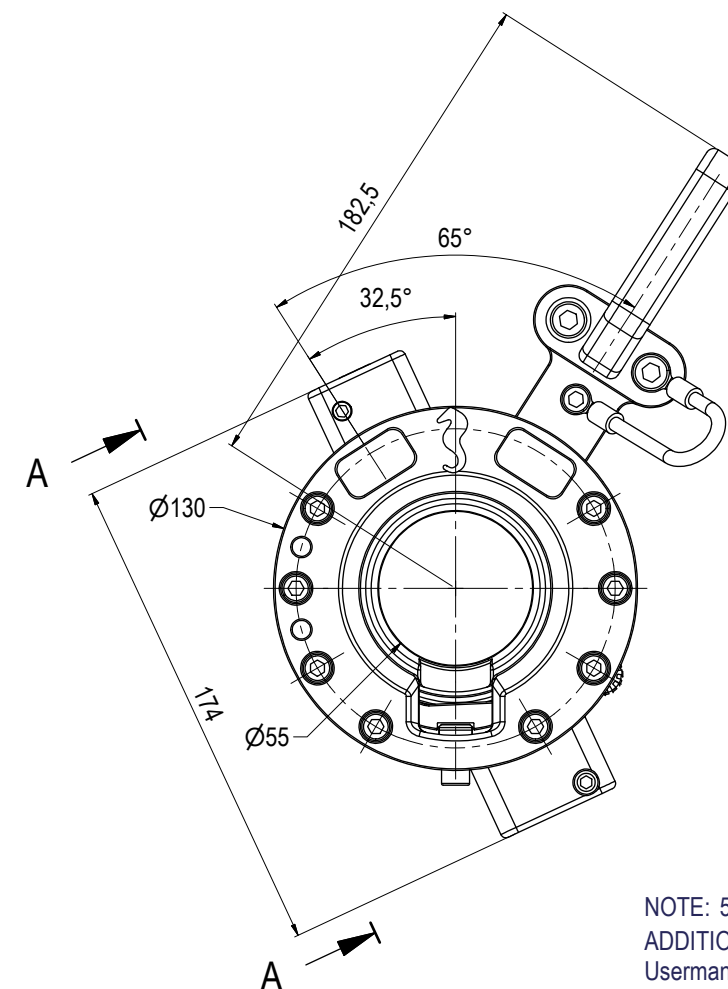


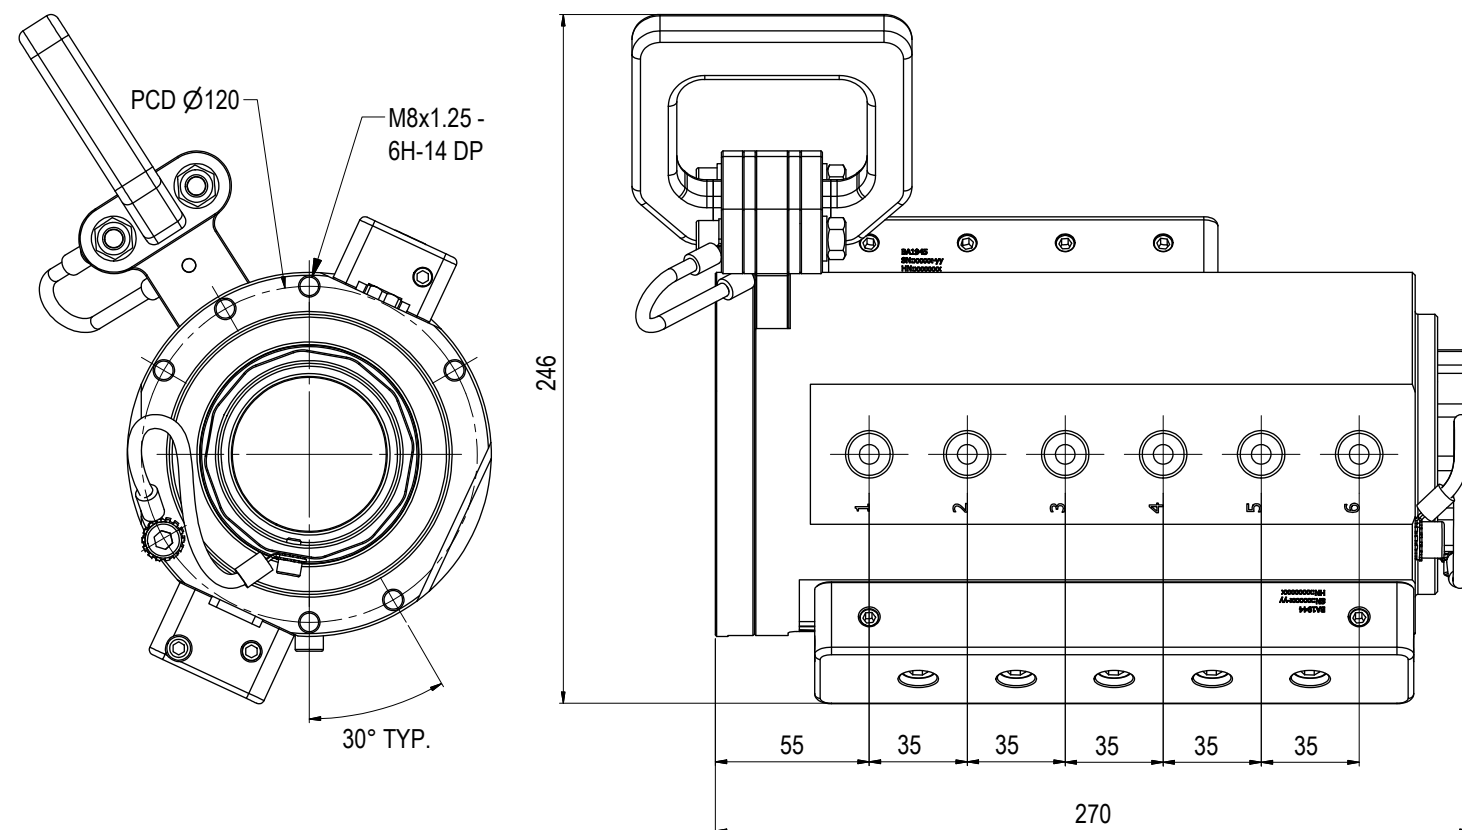

NOTE: 1
DESIGN CODE:
NS-EN 13445


NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 003-Valve Stabs
Main Group: 3.03. Ø55-Valvestab
Intermediate Group: 3.12.02. Receptacle
Sub Group: 3.12.69.6. Hexa

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth:
Material: Intervention
Weight: 23,2 kg
Volume: 3 dm³
Submerged Weight: 20,12 kg
Surface Area: 6302 cm²
Hydraulic: 3/8" BSP
Mechanical: 8xM6 Socket Head@PCD 114
Electrical: N/A
Com. & Protocol: N/A


NOTE: 4
SPAREPARTS:
BB1690

NOTE: 5
ADDITIONAL INFORMATION:
Usermanual: 600112-TD-0003

Note!
This VStab receptacle is only compatible with hexa port Vstab. Mating of Vstabs and Vstab receptacles with different number of ports may cause injuries, equipment damage and spill of fluid.

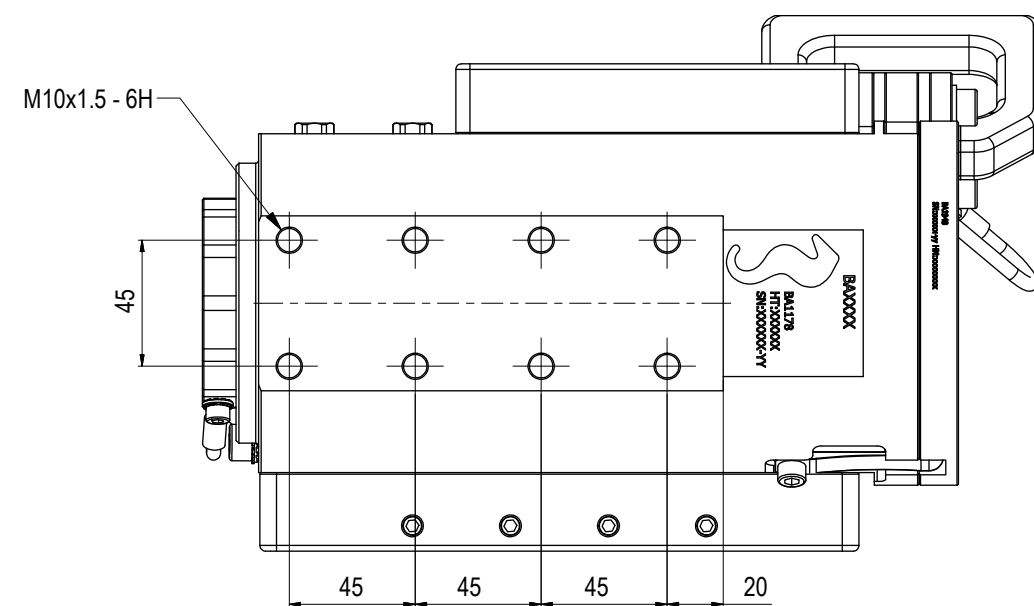

VIEW A-A

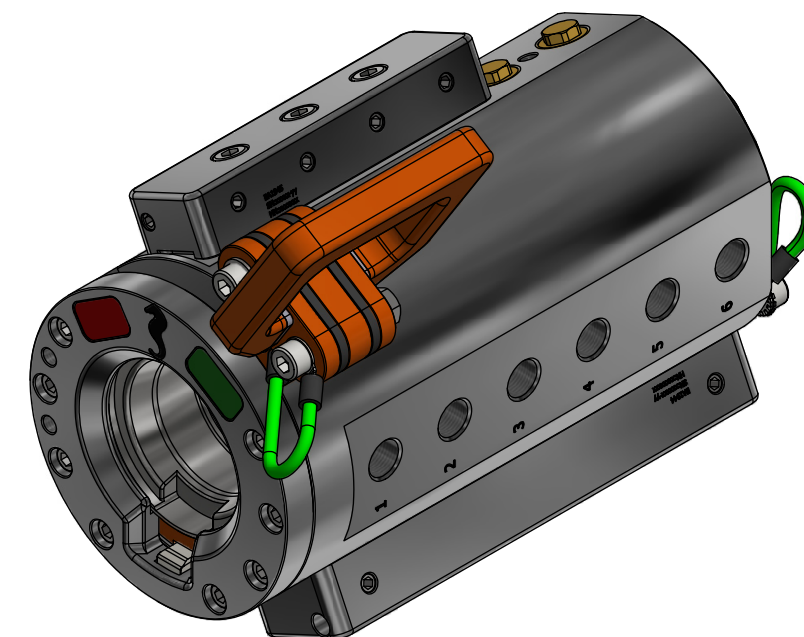

15	30.11.2023	9-IFU (Issued for Use)		WTJ	LGH	WTJ
14	16.11.2021	9-IFU (Issued for Use)		WTJ	LGH	WTJ
13	28.12.2018	2-IFT (Issued for Tender)		WTJ	LGH	WTJ
12	23.3.2018	9-IFU (Issued for Use)		WTJ	LGH	WTJ
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.

BLUE LOGIC

Dwg Scale:
NTS
Dwg Proj:
Dwg Format:
A3

Drawing title:
Ø55 HP VStab Rec 10k Interv FI Mani BSP 3/8"

Drawing number:
BA1174

Rev.
15