


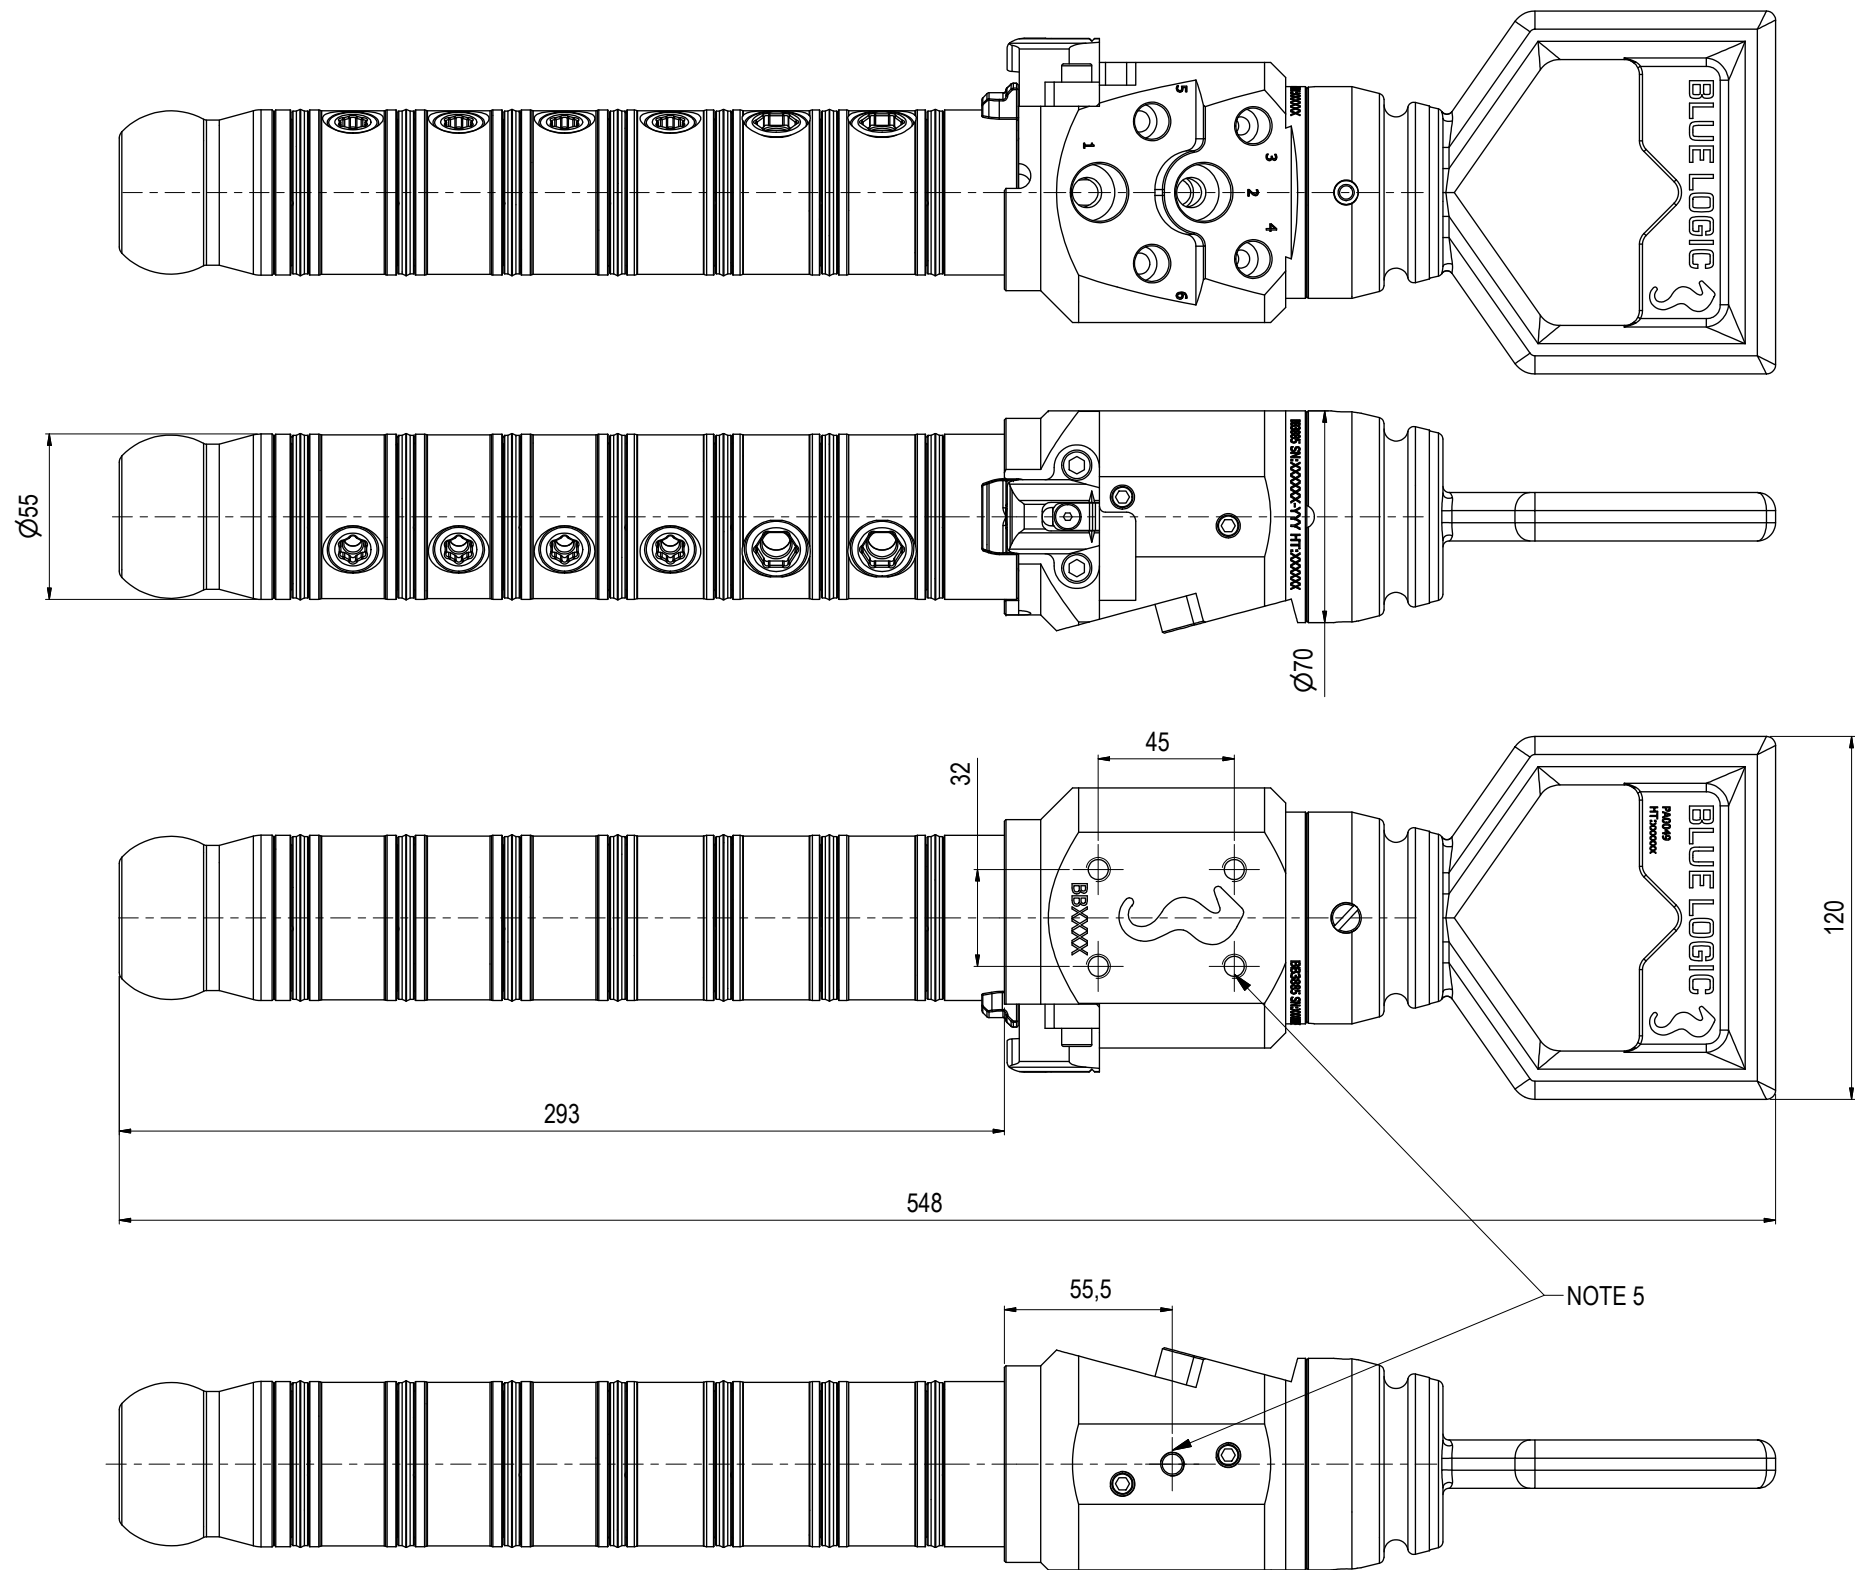

NOTE: 1
DESIGN CODE:
ISO-EN 13445

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 003-Valve Stabs
Main Group: 3.03. Ø55-Valvestab
Intermediate Group: 3.12.01. Stab
Sub Group: 3.12.32.6. Hexa


NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 250
Design Water Depth: 3000m
Material: Intervention
Weight in Air: 8,9 kg
Volume: 1,24 dm³
Submerged Weight: 7,59 kg
Surface Area: 3382 cm²
Hydraulic: 1/2" BSPx2 - 1/4" BSPx4
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
SPAREPARTS:
BB1689

NOTE 5
M8 bolt holes for add on equipment

NOTE: 6
ADDITIONAL INFORMATION:
This VStab is only compatible with hexa port Vstab receptacles with 2 off 1/2" BSP ports and 4 off 1/4" BSP ports. Mating of Vstabs and Vstab Receptacles with different number of ports may cause injuries, equipment damage and spill of fluid.

Usermanual: 600112-TD-0003

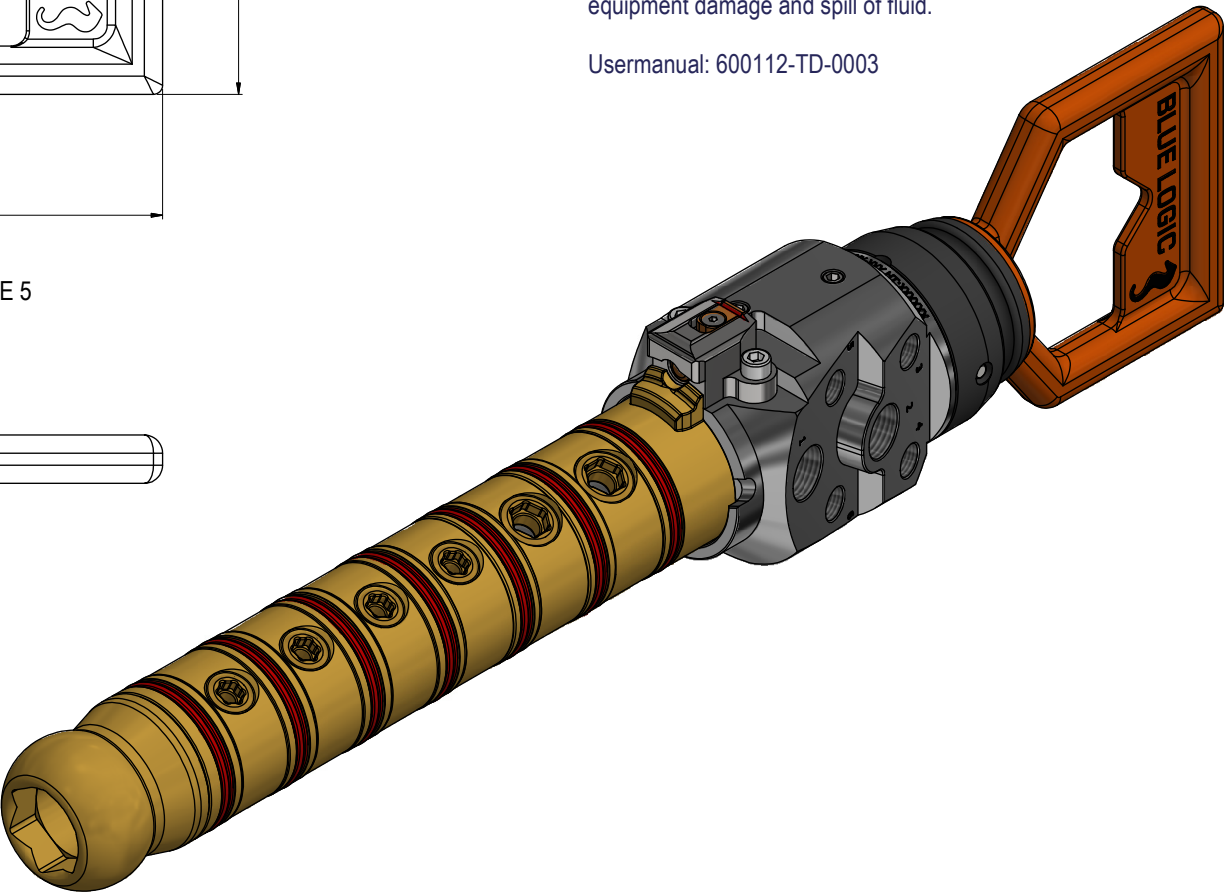

03	22.10.2021	9-IFU (Issued for Use)		WTJ	LGH	WTJ		Dwg Scale: NTS	Drawing title: Ø55 HP VStab 250Bar Interv BSP1/2"x2 - BSP1/4"x4	Drawing number: BB3884	Rev. 03
02	20.4.2020	9-IFU (Issued for Use)		WTJ	TBA	LGH		Dwg Proj: 			
01	3.10.2019	2-IFT (Issued for Tender)		WTJ	HNJ	WTJ		Dwg Format: A3			
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.					