


Parts List							
ITEM	QTY	PART No.	TITLE				
1	1	BA1045	Ø35 SP Rec 10k Interv BSP 1/2"				
2	1	PA0088	2-Way Check Valves 10k Interv BSP 1/2" - 2,0-0,5 Bar FM-M				

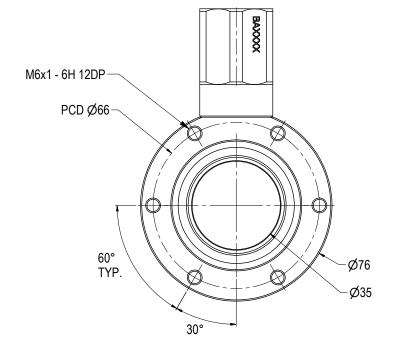

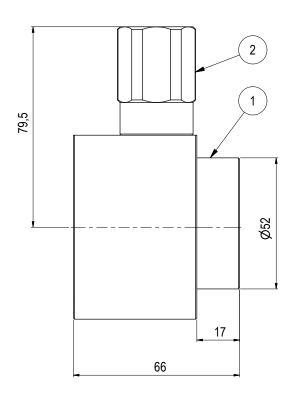

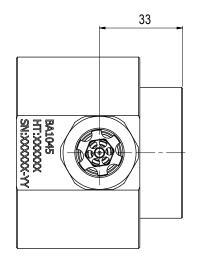

NOTE: 1 DESIGN CODE: API 17H/6A

NOTE: 2

TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.01. Ø35 Hot Stab
Intermediate Group: 1.1.2.01. Single

NOTE: 3

Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Intervention
Weight: 1,6 kg
Volume: 0,2 dm^3
Submerged Weight: 1,38 kg
Surface Area: 449 cm^2
Hydraulic: BSP 1/2"
Mechanical: 6x M6@PCD 66

INTERFACE INFORMATION:

Electrical: N/A Com. & Protocol: N/A


NOTE: 4 SPAREPARTS: BA5287

NOTE: 5

ADDITIONAL INFORMATION:

The $\varnothing 35$ mm Blue Logic Hot Stab is made according to API 17D. This Hot Stab is in general designed for flow up to approx 25 liters pr. munute. We have pressure rating up to PSI 20K or 1380 Bar. The Hot Stab system can also be fitted with an lock-system.

All Blue Logic Receptacles is Standardized with BSP Interface. NPT and MP (Autoclave or Similar) Interfaces can be delivered upon request.

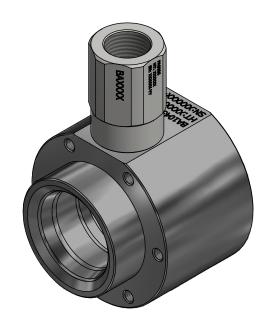

02	25.4.2014	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
01	3.10.2011	Issued for Construction		LGH	NA	NA
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.



)wg Scale:		Drawing title:				
NTS		Ø35 SP Rec 10k Interv wCW BSP 1/2" ID8mm				
Owg Proj:	\(\Phi\)		11			
)wg Format: \3						
		Drawing number:		Rev.		