

NOTE: 1 DESIGN CODE: API 17H/6A

NOTE: 2

TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.01. Ø35 Hot Stab
Intermediate Group: 1.1.2.02. Receptacle
Sub Group: 1.1.2.02. Dual

NOTE: 3

INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: N/A
Material: Intervention
Weight in Air: 8,6 kg
Volume: 3,04 dm^3
Submerged Weight: 5,46 kg
Surface Area: 9063 cm^2


Hydraulic: BSP 1/2"
Mechanical: N/A

Electrical: Subconn BCR2410M Com. & Protocol: RS232/Ethernet

NOTE: 4

ADDITIONAL INFORMATION:

Multi-interface coupler for transferring electrical power, data communication and hydraulics. The unit consist of a Blue Logic standard Dual Port Receptacle with integrated 250W Inductive Connector. Allows for quick connection and disconnection of electric and hydraulic interface in one go. Ideal for subsea connection of ROV tooling with both electrical and hydraulic functions/features. This is the female part intended for installation on the tool.

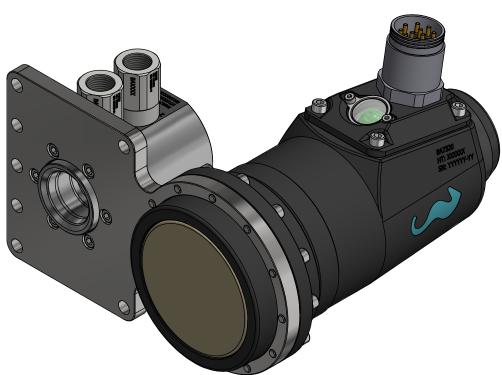

01	8.2.2021	9-IFU (Issued for Use)		WTJ	KOS	WTJ		
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.		



	Dwg Scale:	Drawing title:				
NTS		Ø35 DP Rec 10k w250W Inductive Connector				
	Dwg Proj:	DOO DE NEC TOR WZOOW INQUOLIVE CONNECTOR				
	»]					
	Dwg Format:					
	A3					
		Drawing number:		Rev.		