


NOTE: 1
DESIGN CODE:
NS-EN 13445:2009 / ISO 13628-8

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 003-Valve Stabs
Main Group: 3.07. Dual Bore-Valvestab
Intermediate Group: 3.42.1. Stab
Sub Group: 3.42.102.6. Hexa

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Material: Semi Permanent
Weight: 9,2 kg
Volume: 1,26 dm³
Surface Area: 3689 cm²
Hydraulic: 3/8" BSP
Mechanical: D-Handle
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
Male Valve Stab with 6 individual hydraulic lines. Designed for short term submersion in intervention applications.
This valve stab is equipped with a universal key and can be inserted and mated with receptacles with any key. The stab will also fit into standard receptacles without key.
The Valve Stab hydraulic connection system is a pressure balanced hydraulic connector system with integrated ball valves in all ports on both the male and female side. Can be connected and disconnected with full system pressure, water ingress and pollution to sea during connection and disconnection is negligible.
For more information - request usermanual 600142-TD-0001.

NOTE: 5
SPAREPARTS:
<http://e-sea.bluelogic.no/main.aspx?page=article&artno=BB1053>

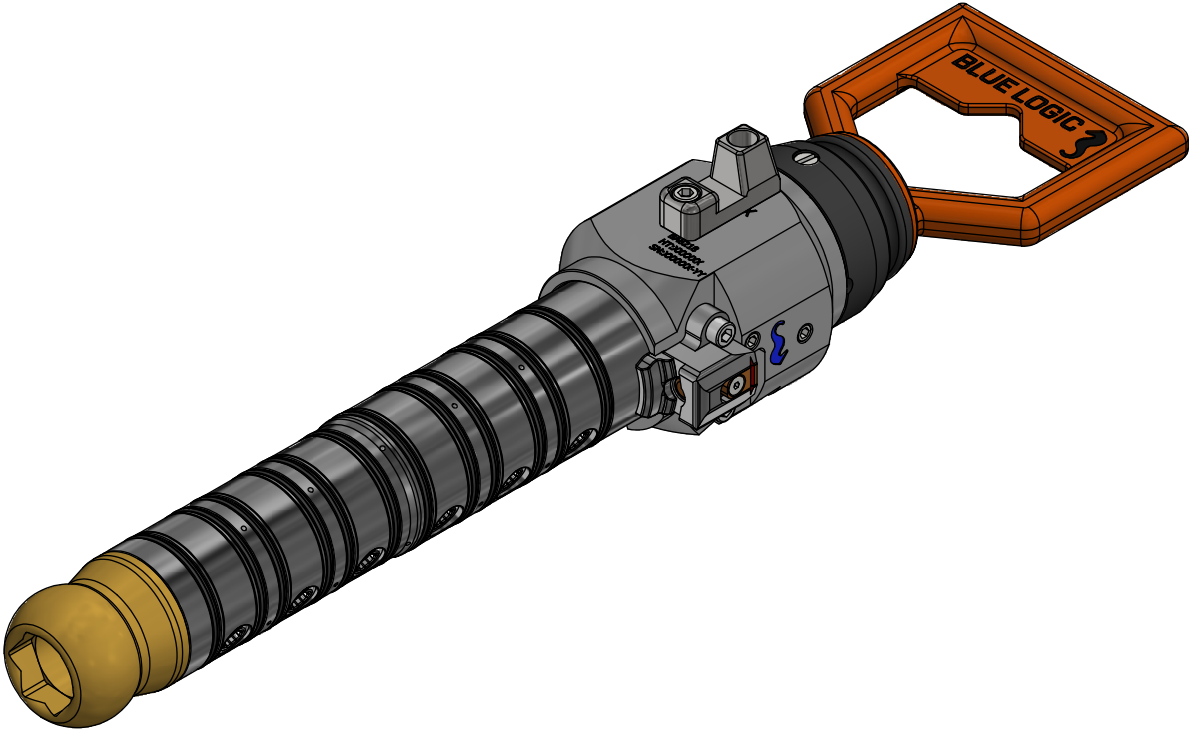

WEB REFERENCE LIST							
ITEM	QTY	PART No.	TITLE	WEBLINK			
1	1	BB0693	Key Universal for Stab wTool Interface V2	http://e-sea.bluelogic.no/main.aspx?page=article&artno=BB0693			
2	1	BA7469	Ø55/Ø57 HP VStab 10k Semi Perm BSP 3/8" Double Seal	http://e-sea.bluelogic.no/main.aspx?page=article&artno=BA7469			
3	2	100363	Bolt				
01	14.12.2017	9-IFU (Issued for Use)			WTJ	LGH	WTJ
Rev.	Date	Reason for issue		Revision change		Made	Chk'd Appr.



Dwg Scale: NTS Dwg Proj: Dwg Format: A3	Drawing title: Ø55/Ø57 HP VStab with Universal Key	Drawing number: BB0694	Rev. 01
-----------------------------------------------------	-------------------------------------------------------	---------------------------	------------