


NOTE: 1
DESIGN CODE:
NS-EN 13445:2009 / ISO13628-8

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 003-Valve Stabs
Main Group: 3.07. Ø55/Ø57-Valvestab
Intermediate Group: 3.42.02. Receptacle
Sub Group: 3.42.103.6. Hexa


NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Material: Long-term
Weight: 20,6 kg
Volume: 2,68 dm³
Surface Area: 5576 cm²
Hydraulic: 3/8" BSP
Mechanical: 8xM10 (45x45x45)
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
Valve Stab Receptacle with 6 individual hydraulic lines for Long-term submersion, when connected to external CP system.
When stab is inserted and valves opened (red position) a weak link system ensures that the stab can be pulled out in an emergency situation, emergency release force approx. 3kN.
ROV Handle in green position: All valves closed, stab free to mate or remove.
ROV Handle in red position: All valves open, stab locked into receptacle.
For more information - request usermanual 600142-TD-0001.

NOTE: 5
SPAREPARTS:
<http://e-sea.bluelogic.no/main.aspx?page=article&artno=BB1053>

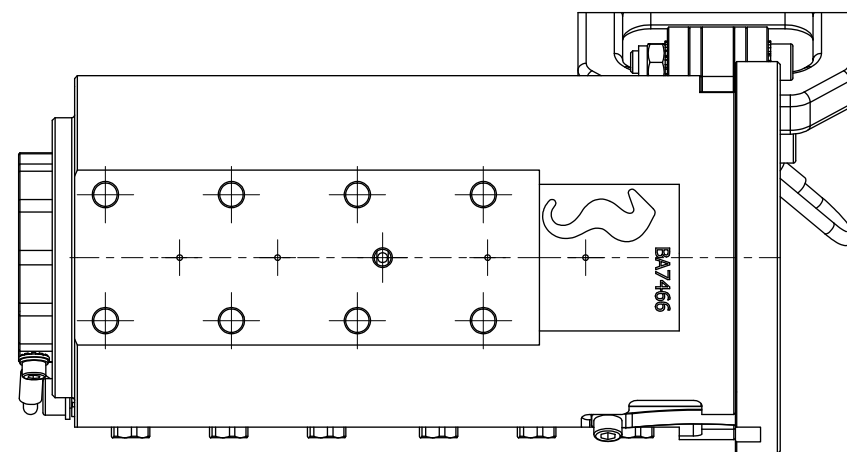

VIEW A-A
(MOUNTING INTERFACE)

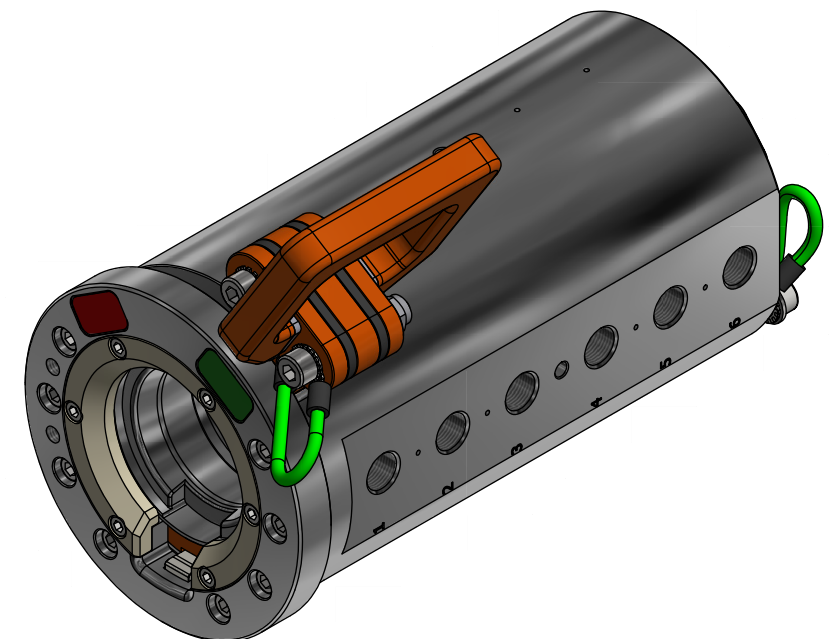

22	30.11.2023	9-IFU (Issued for Use)		WTJ	LGH	WTJ
21	9.10.2023	9-IFU (Issued for Use)		WTJ	LGH	WTJ
20	12.9.2023	9-IFU (Issued for Use)		WTJ	LGH	WTJ
19	30.1.2023	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.

BLUE LOGIC

Dwg Scale:
NTS
Dwg Proj:
Dwg Format:
A3

Drawing title:
Ø55/Ø57 HP VStab Rec 10k Long-term BSP 3/8" Double Seal
Drawing number:
BA7466
Rev.
22