


Parts List				
ITEM	QTY	PART No.	DESCRIPTION	
1	1	BA4826	Ø80 SP Stab 10k Interv Weco 1502 Female 2" ID 45 wJ-Lock	
2	1	BA4822	Ø80 SP Rec 10k Long-term 2" Full Bore wJ-Lock 2" WN Sch 160	
3	1	BA1587	Ø80 SP Park Rec Vented Long-term	
4	1	BA2363	Ø80 SP Press Stab 10k Long-term w J-Lock	
5	1	BC1047	Ø80 SP Press Stab 10k Long-term J-Lock with Bleed Off Function	
6	1	BA9359	Ø80 SP Prot Stab 10Bar Long-term	

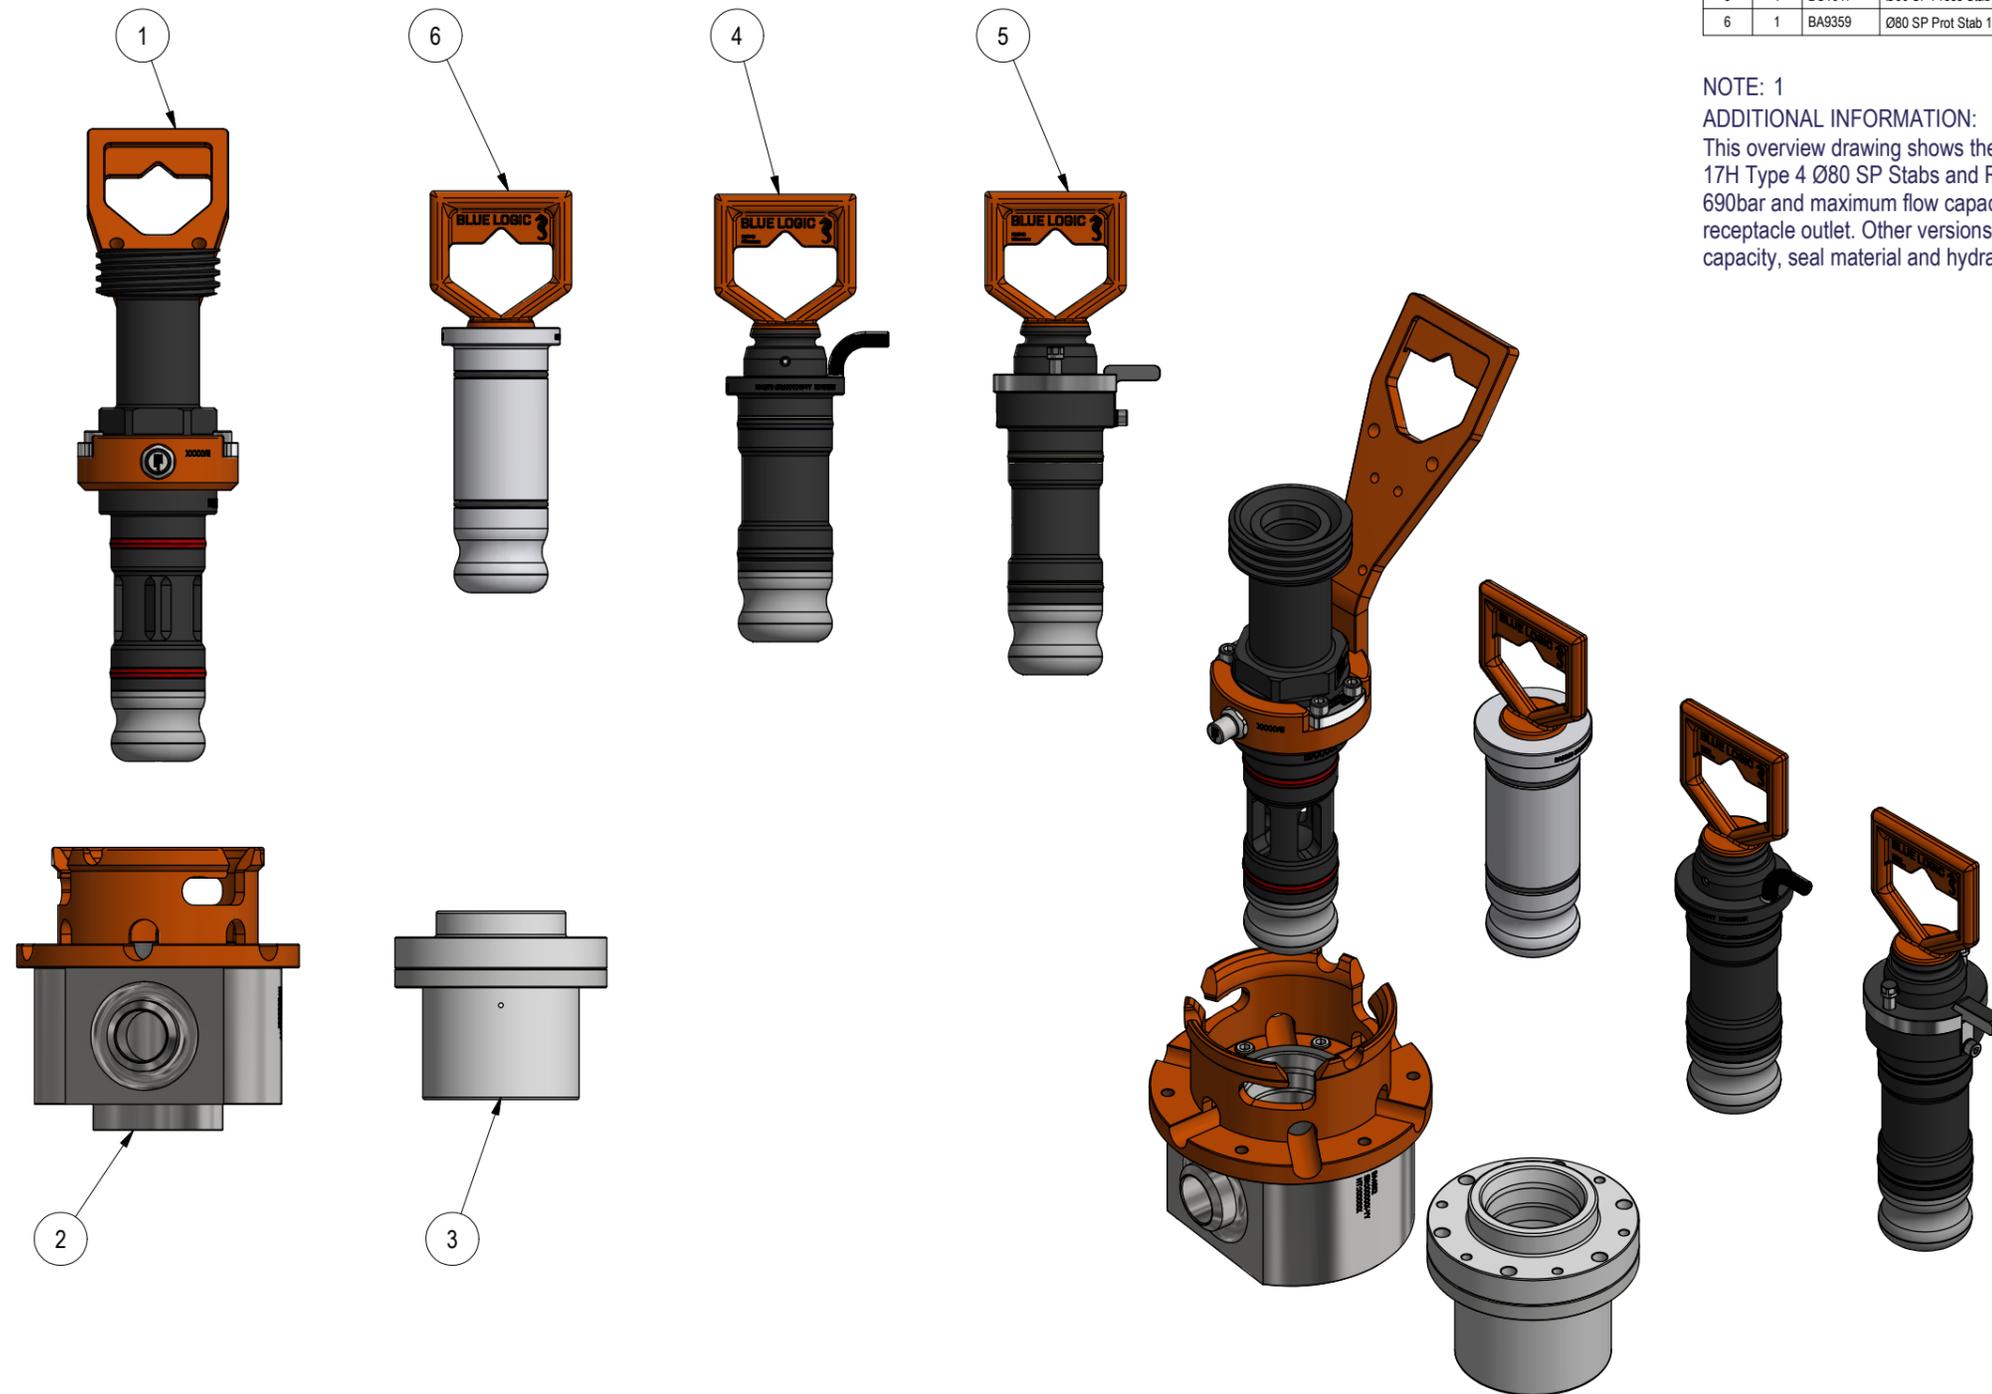

NOTE: 1
 ADDITIONAL INFORMATION:
 This overview drawing shows the basic versions of the Blue Logic API 17H Type 4 Ø80 SP Stabs and Receptacles. Pressure rating up to 690bar and maximum flow capacity approx. 2000 l/min depending on receptacle outlet. Other versions with regards to number of ports, flow capacity, seal material and hydraulic interface are available.

FOR INFORMATION ONLY

Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.
01	9.2.2024	3-IFI (Issued for Information)		WTJ		

BLUE LOGIC 

This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission

Dwg Scale:	NTS
Dwg Proj:	
Dwg Format:	A3

Drawing title:	Ø80 Hot Stab System Overview	
Drawing number:	BC0800	Rev. 01