

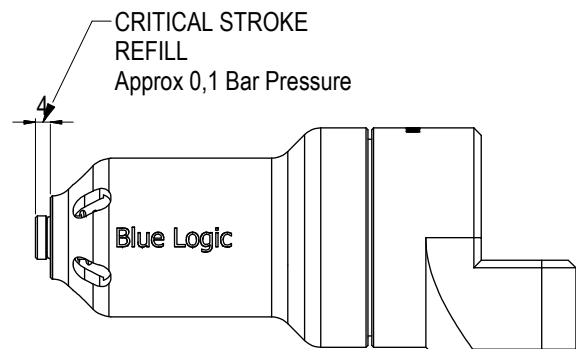
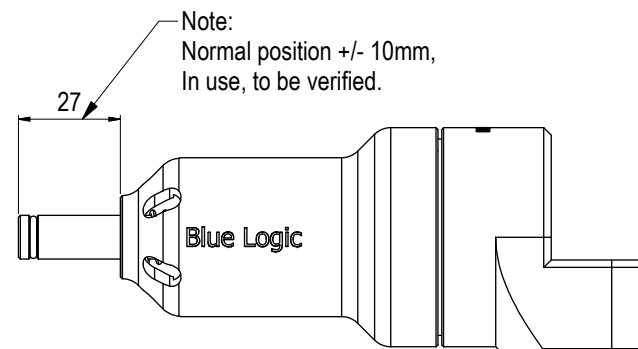


NOTE:  
To verify that all air  
has been removed,  
piston rod should feel  
firm and should not move  
if pushed in.

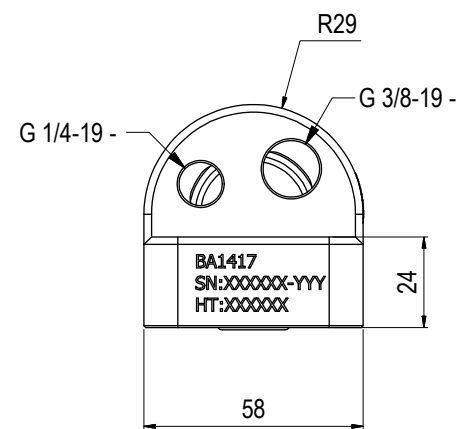


Optional Equipment:  
Pressure Relief Valve  
Type:BA1382 3/8" BSP.  
(Avoide damage pressure)

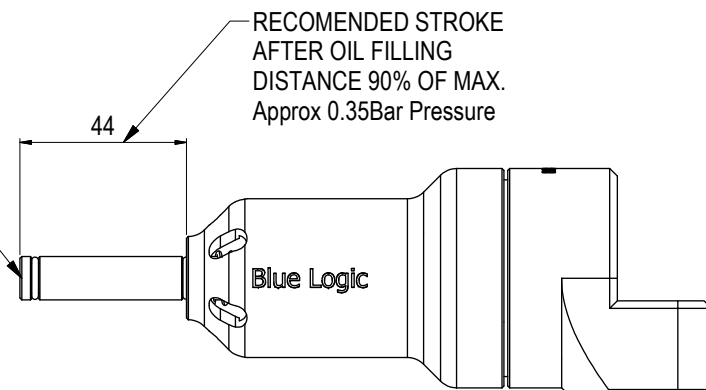

NOTE: 1  
DESIGN CODE:  
N/A

NOTE: 2  
TECHNICAL CLASSIFICATION:  
Article Type: 014-Subsea Equipment  
Main Group: 14.02. Hydraulic Oper. Tools  
Intermediate Group: 14.79.01. Compensator  
Sub Group: 14.79.335.01. 0-50 ml

NOTE: 3  
INTERFACE INFORMATION:  
Pressure Rating Bar: N/A  
Material: Intervention  
Weight: 1,2 kg  
Volume: 0,18 dm^3  
Surface Area: 743 cm^2  
Hydraulic: 40ml Compensator  
Mechanical: N/A  
Electrical: N/A  
Com. & Protocol: N/A

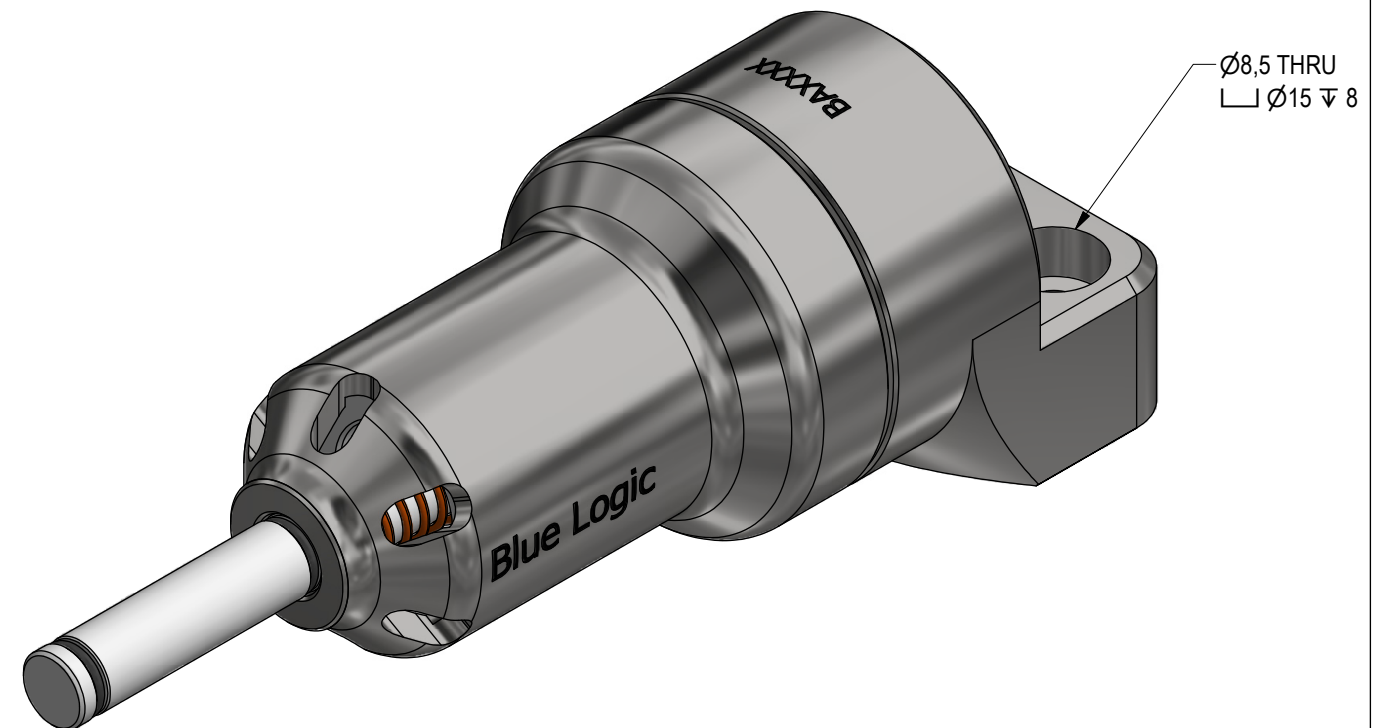

Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.
03	21.10.2019	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
02	16.12.2013	9-IFU (Issued for Use)		HNJ	LGH	HNJ
01	21.10.2011	Issued for Information		vafnse	EKJ	LGH

**BLUE LOGIC**

Dwg Scale:  
NTS  
Dwg Proj:  
Dwg Format:  
A3

Drawing title:  
40ml Compensator

Drawing number:  
BA1421

Rev.  
03