
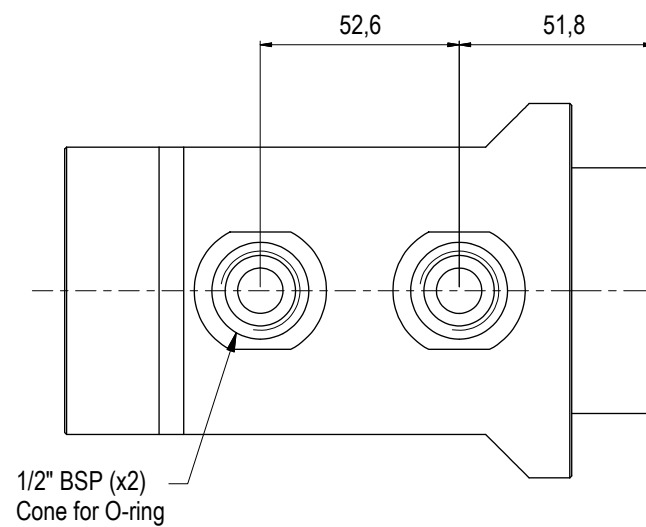
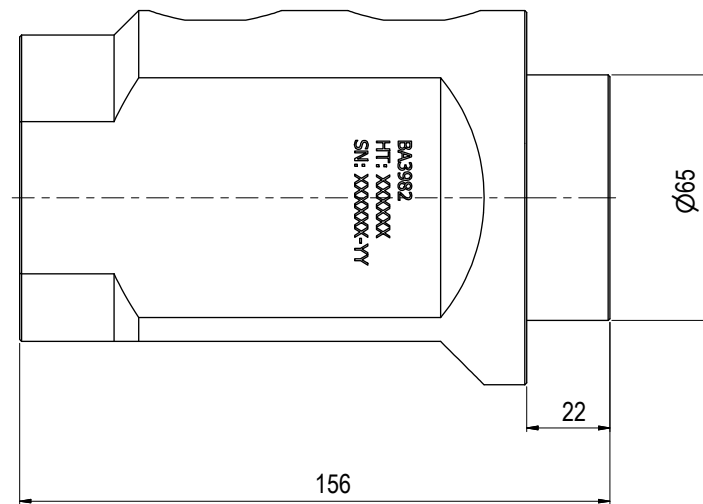


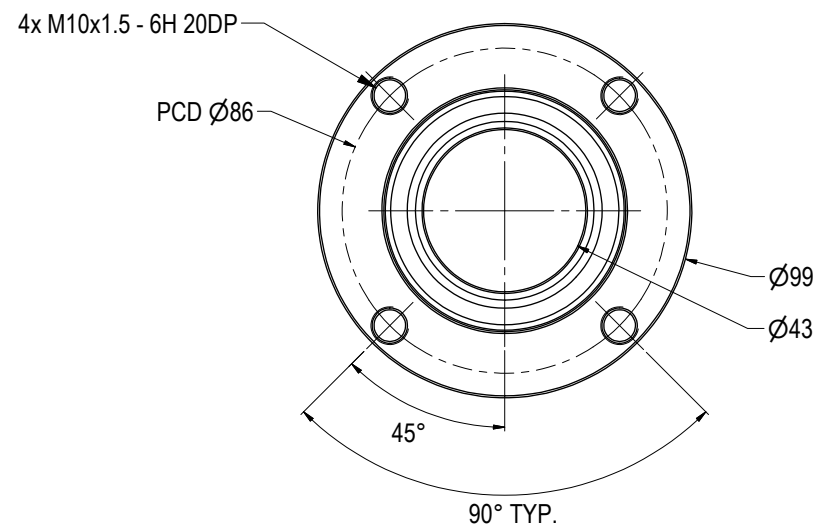


NOTE: 1
DESIGN CODE:
API 17H
ISO 13628-8

NOTE:
TECHNICAL CLASSIFICATION:
Article Type: 001-Hotstabs
Main Group: 1.03. Ø43-Hotstab
Intermediate Group: 1.2.2. Receptacle
Sub Group: 1.2.6.2. Dual

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: N/A
Material: S32750 SUPER DUPLEX
Weight: 5,1 kg
Volume: 0,64 dm³
Submerged Weight: 4,4 kg
Surface Area: 798 cm²
Hydraulic: BSP 1/2"
Mechanical: 4xM10@PCD 86
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
All Blue Logic Receptacles is Standardized with BSP Interface.
NPT and MP (Autoclave or Similar) Interfaces can be delivered upon request.

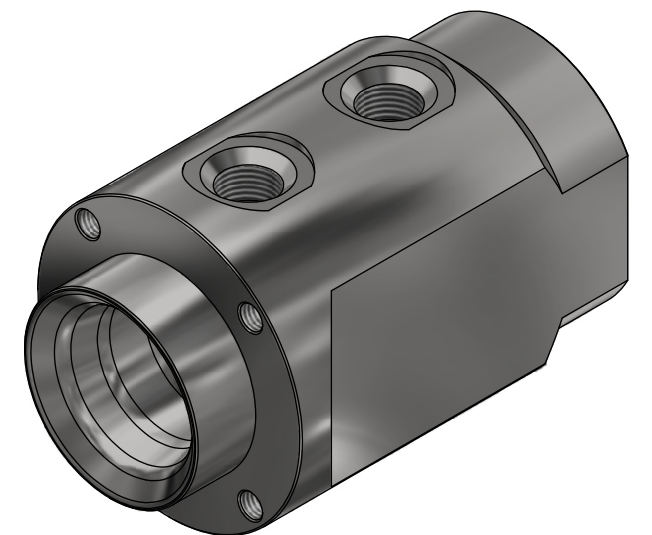

02	6.5.2014	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
01	11.9.2013	7-IFC (Issued for Construction)		TBA	HNJ	LAE
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.

BLUE LOGIC

Dwg Scale:
NTS
Dwg Proj:
Dwg Format:
A3

Drawing title:
Ø43 DP Rec 10k Interv BSP 1/2"

Drawing number:
BA3982

Rev.
02