

NOTE: 1 DESIGN CODE: API 17D API 6A

NOTE: 2

TECHNICAL CLASSIFICATION:
Article Type: 003-Valve Stabs
Main Group: 3.05. Ø100-Valvestab
Intermediate Group: 3.35.01. Stab
Sub Group: 3.35.80.1. Single

NOTE: 3

INTERFACE INFORMATION:

Pressure Rating Bar: 345

Material: 316L/SUPER DUPLEX/S165M/OM7

Weight: 33,3 kg
Volume: 4,63 dm^3
Surface Area: 10357 cm^2
Hydraulic: 2" fig. 1502
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A


NOTE: 4

ADDITIONAL INFORMATION:

Ø100 Valve Stab with 2" Hammer Union and an integrated isolation valve to allow connection/disconnection at full system pressure with no spill of fluid or water ingress. This allows for pressurising the down line when handled with ROV, this makes the risk of damage to the downline minimal. Also it reduce the risk of Hose collapse in case of operating in deep waters. Integrated handle for operation of valves in Valve Stab and Receptacle. Rated for 5000Psi and designed for temporary subsea exposure, i.e. intervention operations.

Note!

This VStab is only compatible with single port Vstab receptacles. Mating of Vstabs and Vstab receptacles with different number of ports may cause injuries, equipment damage and spill of fluid.

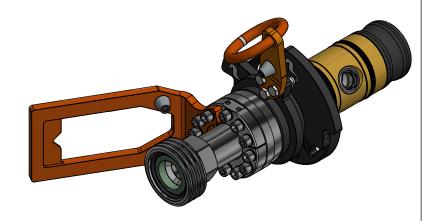

1									
03	31.1.2023	7-IFC (Issued for Construction)		HNJ	TAN	HNJ			
02	16.1.2023	7-IFC (Issued for Construction)		TAN	HNJ	WTJ			
01	31.10.2022	7-IFC (Issued for Construction)		HNJ	LGH	HNJ			
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.			



Scale:	Drawing title:	
S	Ø100 SP VStab 5k Interv 2" fig. 1502	
Proj:	2 100 SF VStab Sk litter 2 lig. 1302	
Format:		
	Drawing number:	R