


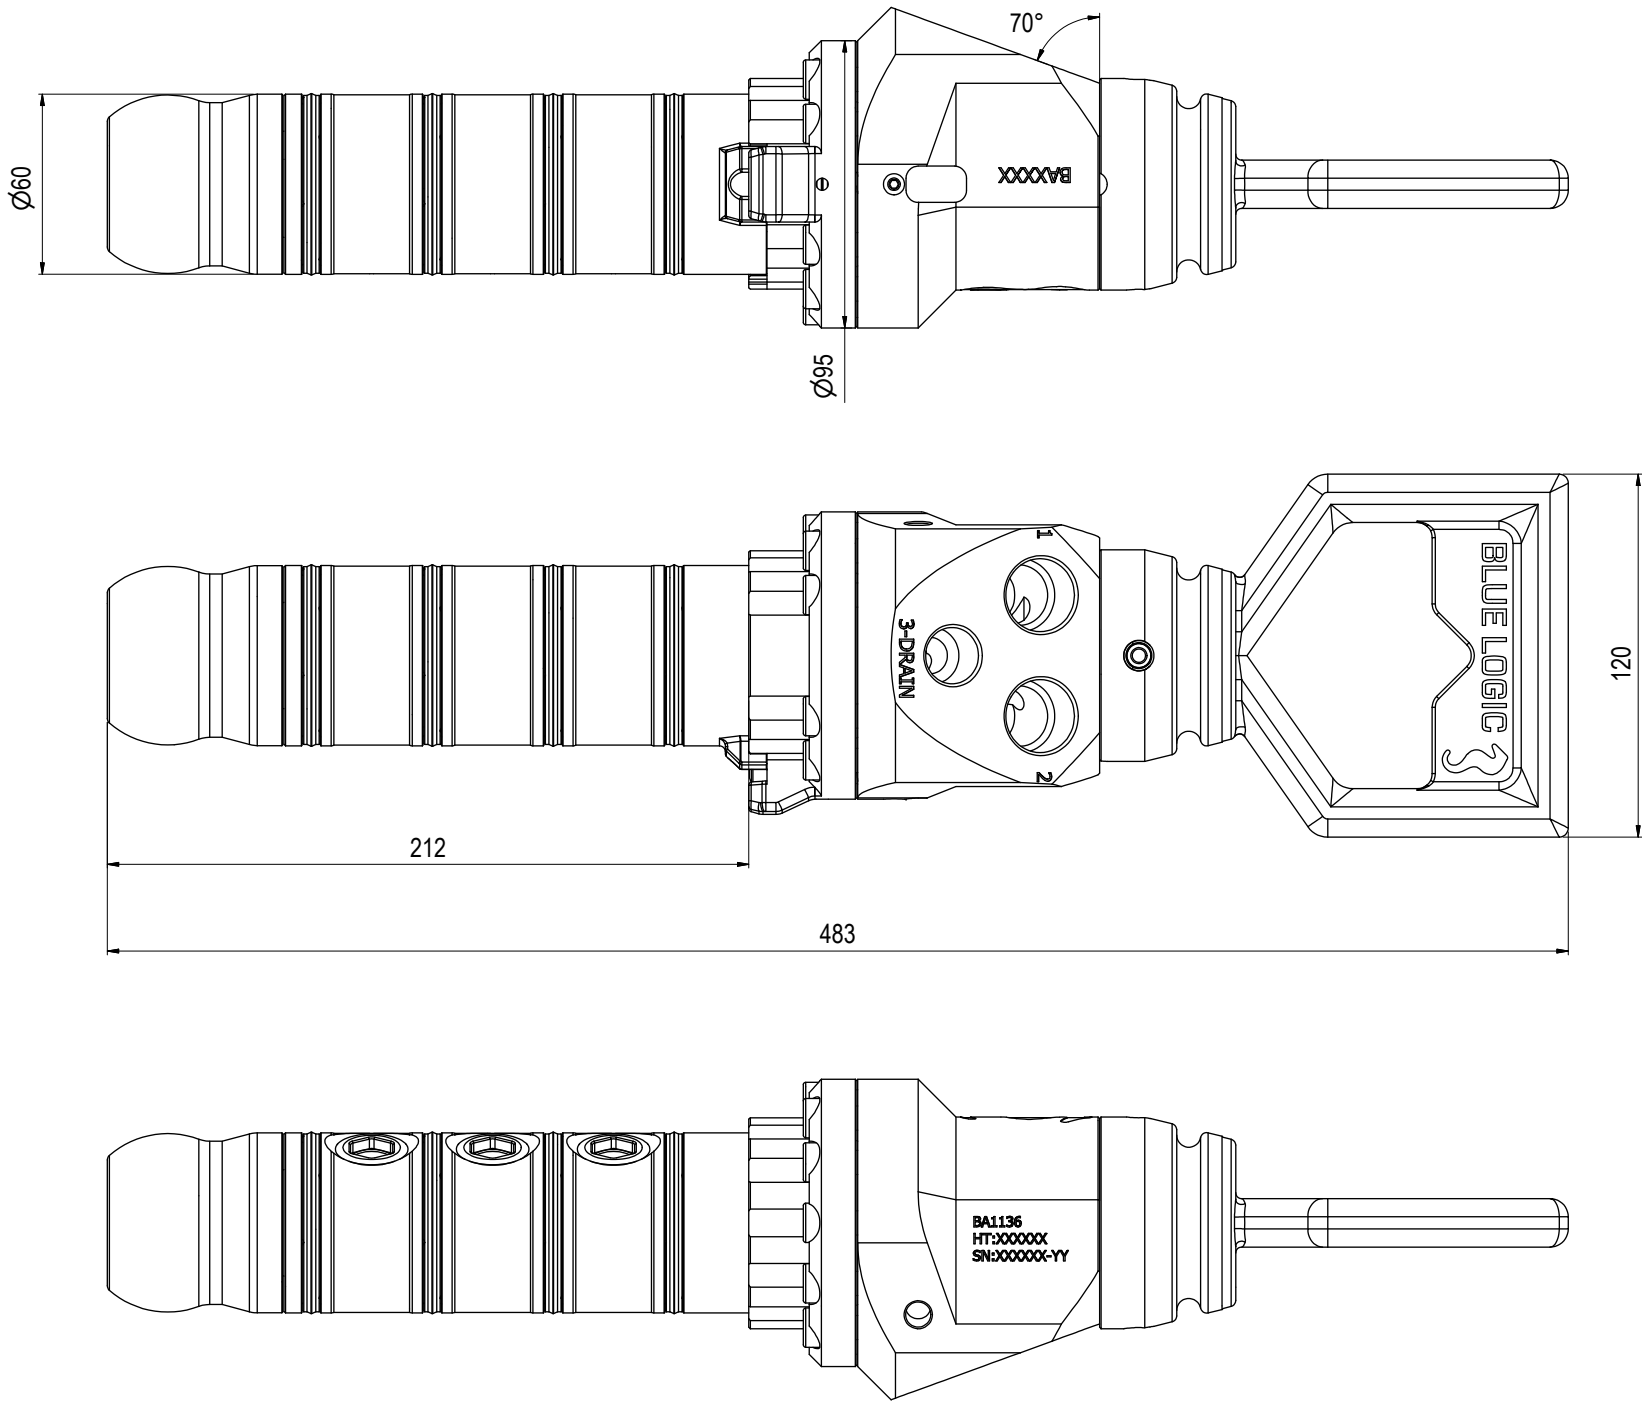

NOTE: 1
DESIGN CODE:
NS-EN 13445

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 003-Valve Stabs
Main Group: 3.04. Ø60-Valvestab
Intermediate Group: 3.34.01. Stab
Sub Group: 3.34.74.3. Triple


NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 250
Design Water Depth:
Material: Intervention
Weight: 9,3 kg
Volume: 1,29 dm^3
Submerged Weight: 8,02 kg
Surface Area: 3384 cm^2
Hydraulic: 2x3/4" BSP - 1x 1/2" BSP
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
SPAREPARTS:
BB1698

NOTE: 5
ADDITIONAL INFORMATION:
This VStab is only compatible with triple port Vstab receptacles. Mating of Vstabs and Vstab receptacles with different number of ports may cause injuries, equipment damage and spill of fluid.

Usermanual: 600134-TD-0004

NOTE: 6
WEB LINK:
<http://e-sea.bluelogic.no/main.aspx?page=article&artno=BA1135>

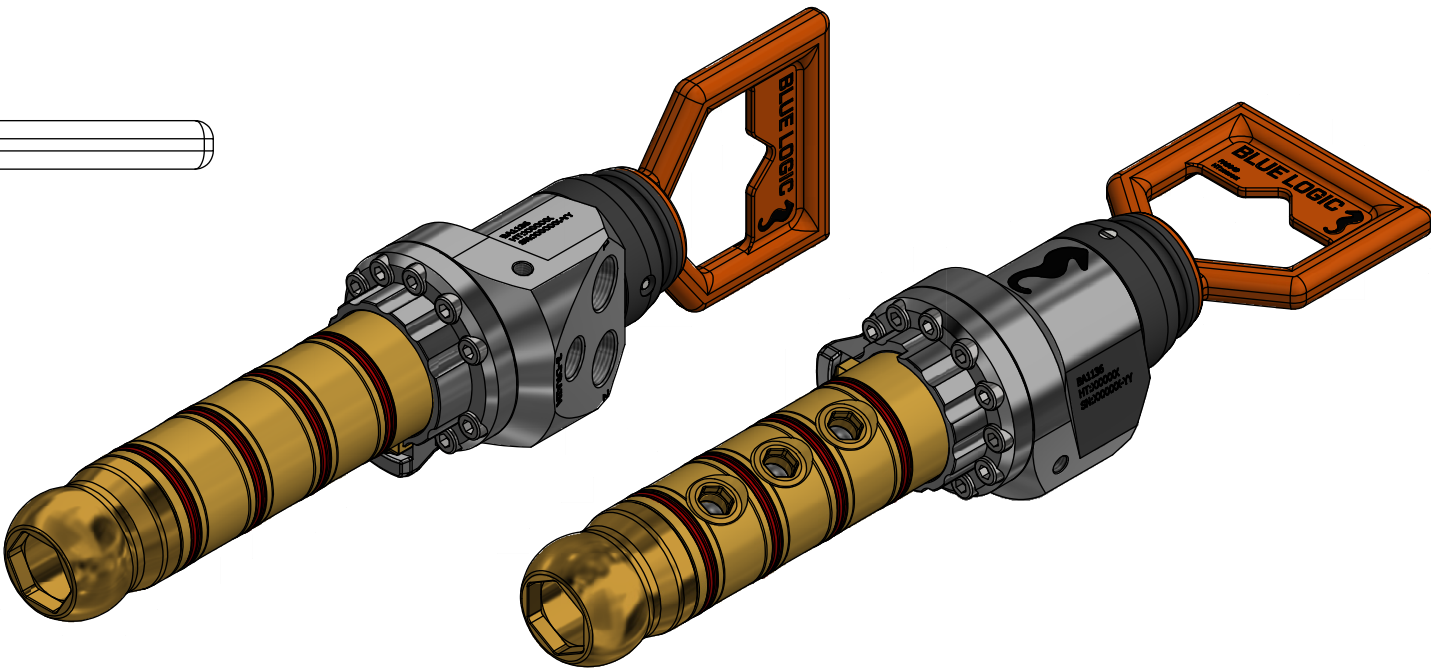

13	15.9.2023	9-IFU (Issued for Use)		HNJ	LGH	HNJ	BLUE LOGIC	Dwg Scale: NTS	Drawing title: Ø60 TP VStab 250Bar Interv 70deg BSP 3/4"-1/2"
12	15.9.2022	9-IFU (Issued for Use)		WTJ	LGH	WTJ		Dwg Proj: 	
11	19.4.2022	9-IFU (Issued for Use)		WTJ	LGH	WTJ		Dwg Format: A3	
10	21.10.2020	9-IFU (Issued for Use)		WTJ	LGH	WTJ			Drawing number: BA1135
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.			Rev. 13