


NOTE: 1
STANDARDS:
N/A

NOTE: 2
INTERFACE INFORMATION:
Hydraulic: 3/8" BSP
Mechanical: N/A
Electrical: N/A
Data Com.: N/A

NOTE: 3
PROPERTIES:
Material Class: N/A
Temperature Class: N/A
Rated Work Press Bar: 1,5
Test Pressure: N/A
Specification Level: N/A
Flow Rate: N/A
Qualification: N/A
Application: Intervention
Load Rating: N/A
Torque Rating: N/A
Design Water Depth: N/A
Weight in Air: 0,1 kg
Volume: 0,01 dm³
Submerged Weight: 0,05 kg

NOTE: 4
WEB LINK:
<http://e-sea.bluelogic.no/main.aspx?page=article&artno=BA5500>

NOTE: 5
ADDITIONAL INFORMATION:
These Relief Valves can be delivered with various cracking pressure on customers request.
Standard temperature rating 0-60 °C
Fluid: hydraulic oils.
This Valve is typical made for use as safety pressure relief.
For other fluids and temp range, confer with Blue Logic.

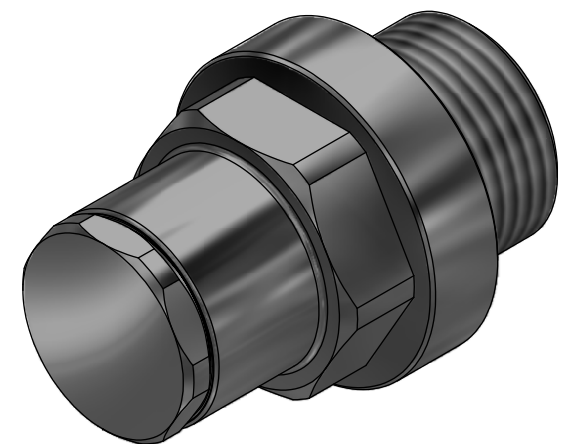

05	3.7.2023	9-IFU (Issued for Use)		WTJ	LGH	WTJ	<div><div>BLUE LOGIC</div><div><div></div></div></div> <div>This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission</div>	Dwg Scale: NTS		Drawing title: Relief Valve 1,5 Bar 3/8" BSP	Drawing number: BA5500	Rev. 05
04	17.1.2022	9-IFU (Issued for Use)		WTJ	HNJ	WTJ		Dwg Proj:				
03	28.3.2017	9-IFU (Issued for Use)		WTJ	HNJ	WTJ		Dwg Format: A3				
02	31.3.2016	9-IFU (Issued for Use)		WTJ	HNJ	WTJ						
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.						