

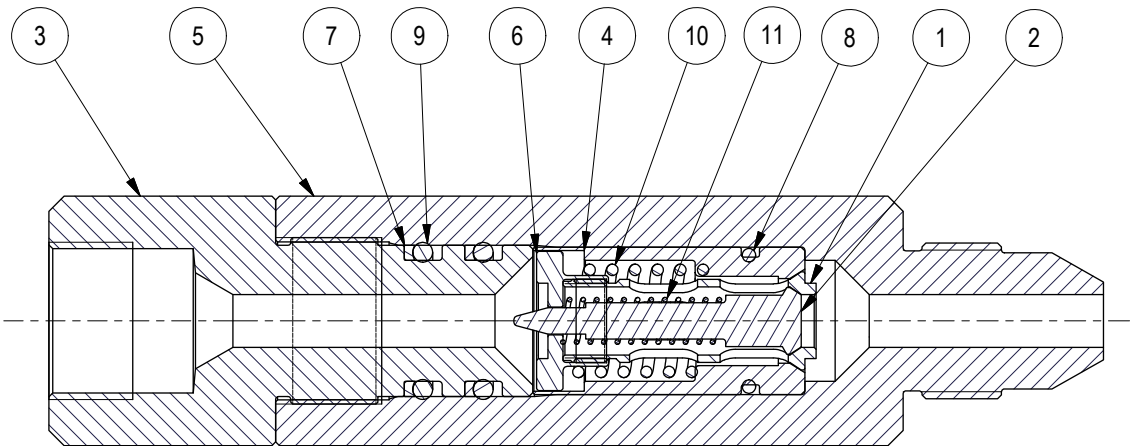
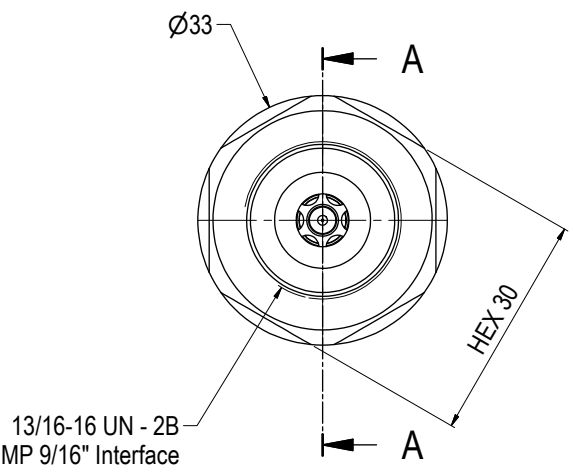


Parts List				
ITEM	QTY	PART No.	DESCRIPTION	MATERIAL
1	1	PA0210	Ring Poppet 2-Way Check Valve	UNSC63200 (OM7)
2	1	PA0209	Center Poppet 2-Way Check Valve	AISI 316L
3	1	BB7267	End Adapter 2-Way Check Valve 20k MP 9/16" ver. 2	S32750 SUPER DUPLEX
4	1	BB5615	Housing 2-Way Check Valve 15k	AISI 316L
5	1	BB4957	Housing for 2-Way Check Valve 20k MP 9/16"	S32750 SUPER DUPLEX
6	1	BA6359	Nut for 2-Way Check Valve ver. 2	S165M
7	2	104113	Back Up Ring Ø20xØ16x1.35 Peek1 Cut	PEEK
8	1	102399	O-Ring BS016 D1=15,6 D2=1,78	NBR
9	2	100174	O-Ring BS114 D1=15,54 D2=2,62	NBR
10	1	100139	Compression Spring SF-TFR 1,5x12x25 SS2331	Stainless Steel
11	1	100136	Compression Spring SF-TFR 0,6x5x25 SS2331	Stainless Steel

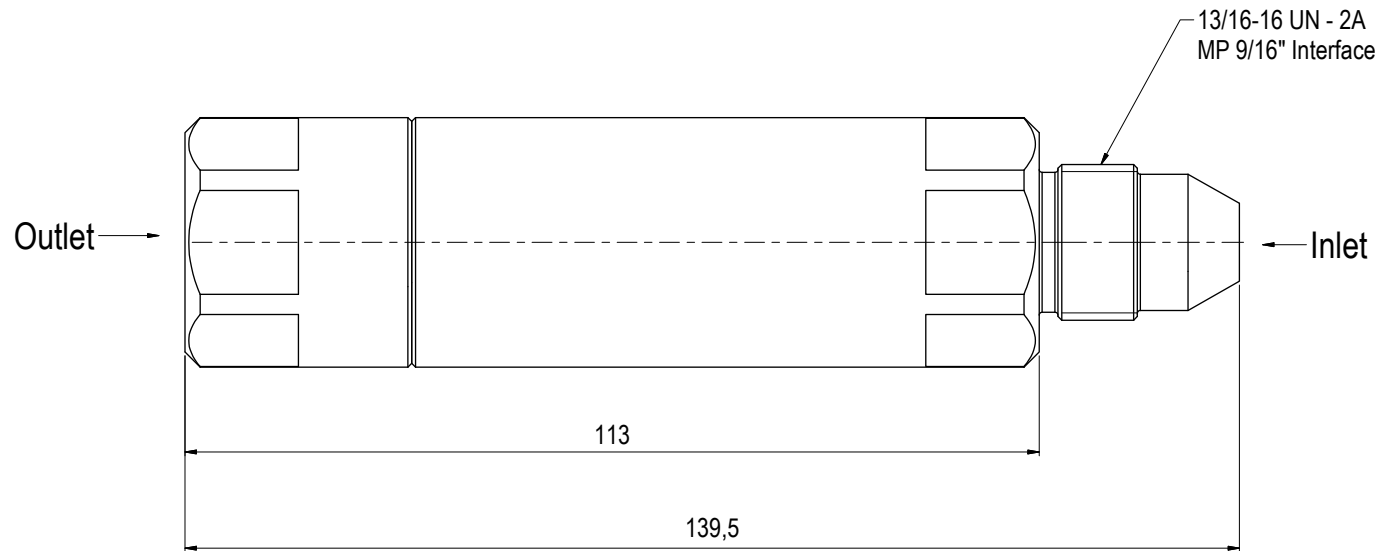

SECTION A-A

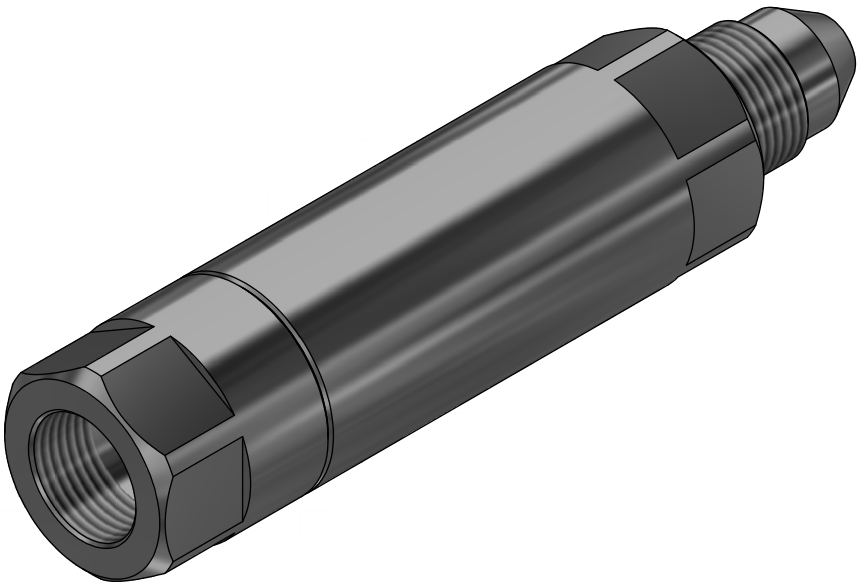

NOTE: 1
DESIGN CODE:
NA

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.09. Valves Hot Stab
Intermediate Group: 1.6.02. 5-8mm
Sub Group: 1.6.22.02. 2-way

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 1380
Design Water Depth: 3000m
Material: Intervention
Weight in Air: 0,7 kg
Volume: 0,09 dm^3
Submerged Weight: 0,58 kg
Surface Area: 375 cm^2
Hydraulic: MP 9/16"
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE: 4
ADDITIONAL INFORMATION:
Opening Pressure Outlet Approx: 2,0 Bar
Opening Pressure Inlet Approx: 0,5 Bar

Only for Fluid

01	6.12.2021	9-IFU (Issued for Use)		WTJ	LGH	HNJ
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.

BLUE LOGIC

This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission

Dwg Scale: NTS	Drawing title: 2-Way Check Valve 20k Interv MP 9/16"- 2,0-0,5 Bar FM-M	
Dwg Proj: 		
Dwg Format: A3	Drawing number: BB5290	
		Rev. 01