
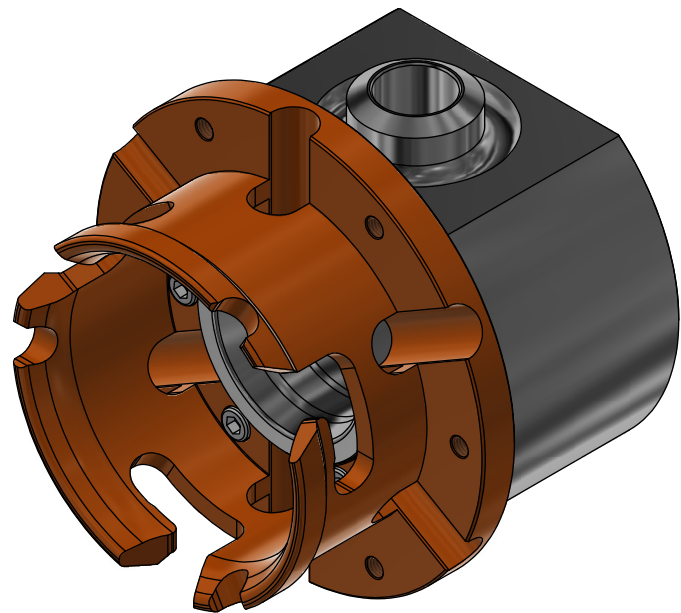
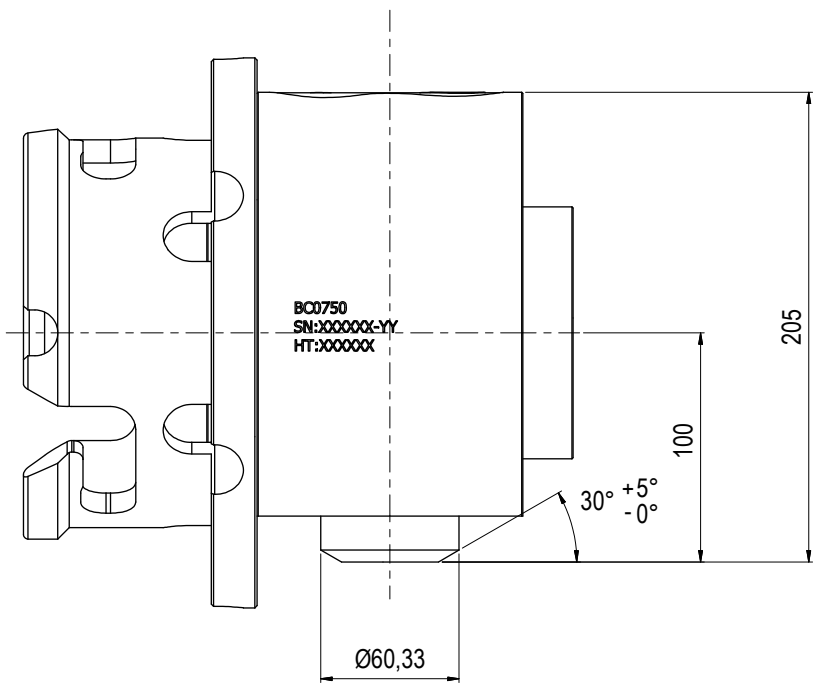
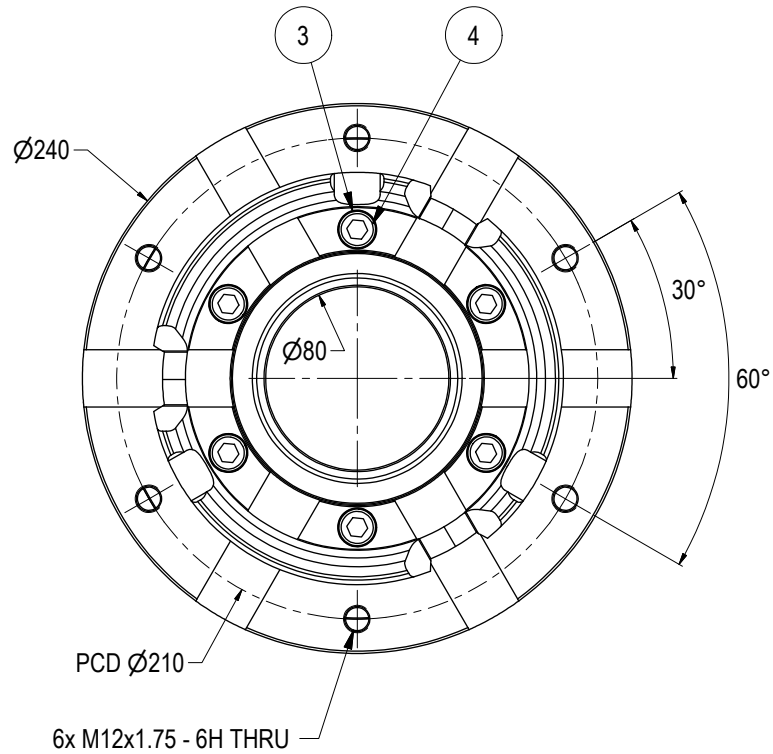
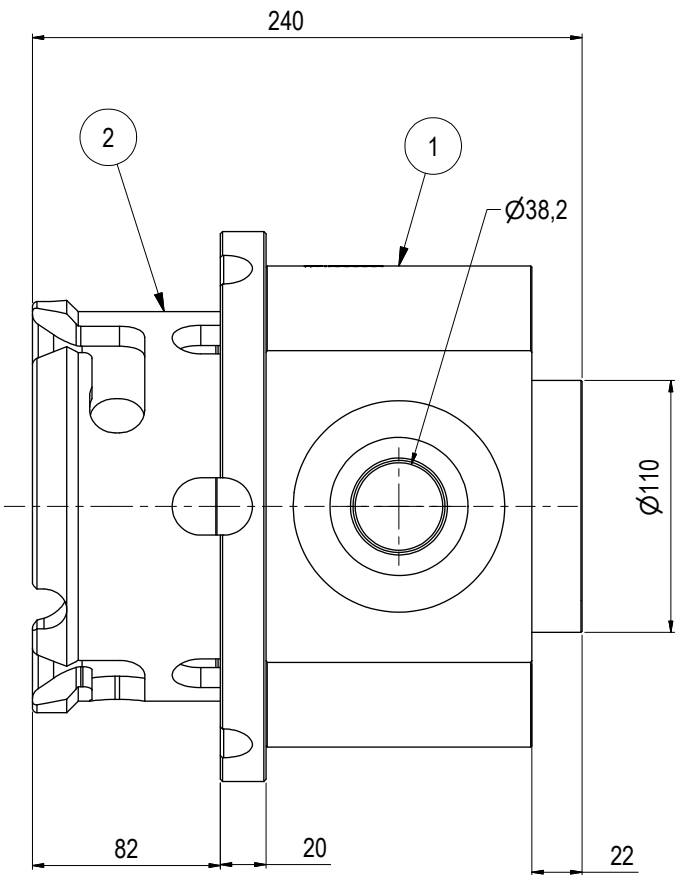


Parts List				
ITEM	QTY	PART No.	DESCRIPTION	MATERIAL
1	1	BC0750	Ø80 SP Rec 10k Long-term WN 2" Sch XXS	S32760 SUPER DUPLEX
2	1	BA4727	Ø80 SP Rec J-Lock Interface version 2	AISI 316L
3	6	101020	Washer	UNS S31254 6MO
4	6	100594	Bolt	A4

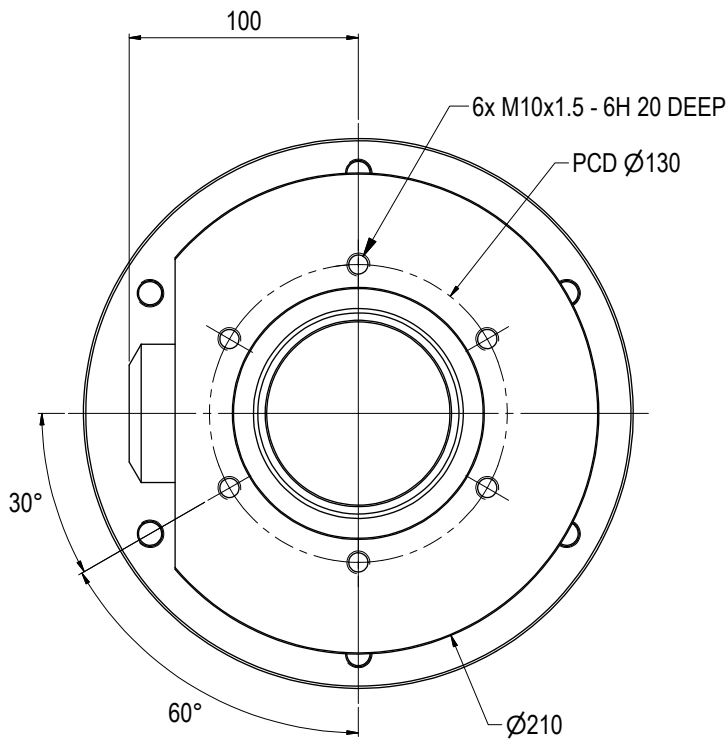

NOTE: 1
DESIGN CODE:
API 17H Type 4
API 6A

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.05. Ø80 Hot Stab
Intermediate Group: 1.41.02. Receptacle
Sub Group: 1.41.100.01. Single

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: 690
Design Water Depth: 3000m
Material: Long-term
Weight in Air: 32,5 kg
Volume: 4,13 dm^3
Submerged Weight: 28,22 kg
Surface Area: 3934 cm^2
Hydraulic: 2" WN Sch XXS
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

NOTE 4
Item 2 can be removed to give sufficient space for welding. Bolt torque Item 4 35Nm

01	5.2.2024	9-IFU (Issued for Use)		HNJ	TAN	HNJ
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.

BLUE LOGIC

This Drawing is the Property of Blue Logic AS © and must Not be Loaned, Reproduced or Transferred to others without written Permission

Dwg Scale: NTS

Dwg Proj:

Dwg Format: A3

Drawing title: Ø80 SP Rec 10k Long-term 2" Full Bore wJ-Lock 2" WN Sch XXS

Drawing number: BC0749

Rev. 01