

NOTE: 1
DESIGN CODE:
N/A

NOTE: 2
INTERFACE INFORMATION:
Hydraulic: N/A
Mechanical: Refer Drawing
Electrical: 48VDC 250W Supply
Data Com.: 100Mbit Ethernet, Cobalt Bulkhead 6-Pin Hybrid


NOTE: 3
PROPERTIES:
Material Class: N/A
Temperature Class: N/A
Rated Work Press Bar: 40Bar
Test Pressure: 450Bar
Specification Level: N/A
Flow Rate: N/A
Qualification: N/A
Application: N/A
Load Rating: N/A
Torque Rating: N/A
Design Water Depth: 400m
Weight in Air: 0,7 kg
Volume: 0,38 dm³
Submerged Weight: 0,35 kg

NOTE: 4
ADDITIONAL INFORMATION:
Subsea Puck designed for 100m applications, with seawater cooling on aluminum back side (if used dry, sprinkle with water if hot).

Drone side connector can be configured for different Battery Configurations (Between 4 cells in series to 12 Cells in series) with Constant Current Constant Voltage (CC/CV) charging algorithm, or as a power supply at a fixed voltage level. See Data-sheet for detailed voltage configuration alternatives and step up and down transformer options available.

The F30-Puck series also allows for data communication alternatives: Power only, RS232, Ethernet (80Mbit to Giga bit), available on request.

Connector Cable in 1m length is delivered along with the product. Custom length can be delivered upon request.

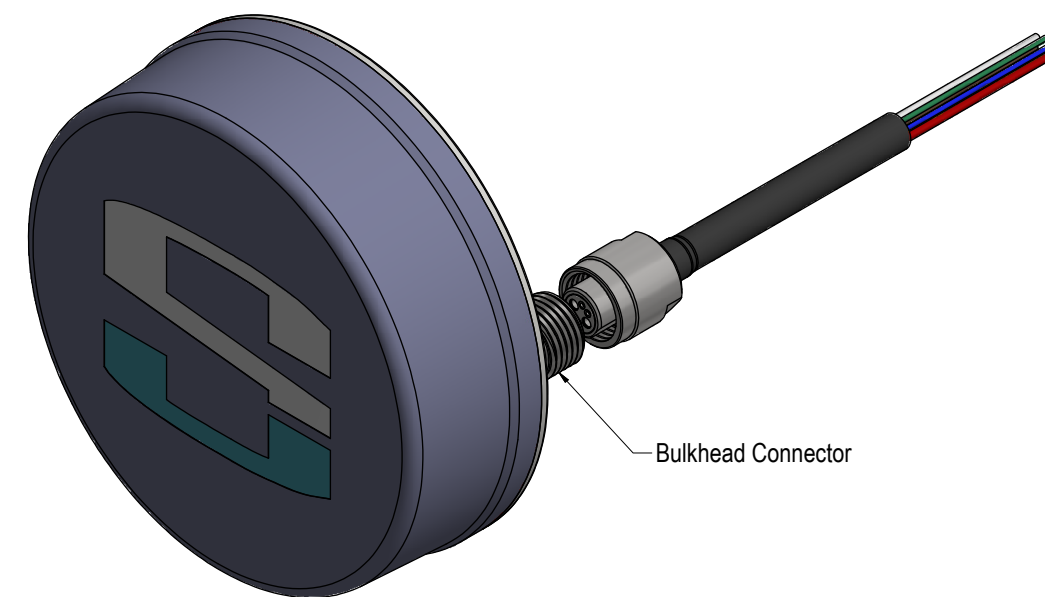

Bulkhead Connector

Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.
02	5.11.2025	7-IFC (Issued for Construction)		WTJ	KSV	WTJ
01	11.10.2023	7-IFC (Issued for Construction)		WTJ	MARCINSE	



Unless Noted Otherwise:	Dwg Scale:	Drawing title:	
Dim. Tol: NS-ISO 2768-1N/A	Dwg Proj:	F30-Sec ChargePuck 7A-4S-R1, 400MWD	
Roughness: RaN/A	Dwg Format: A3	Drawing number: BB9867	Article number:
Fillet Rad: Corner Rmax: N/A	Break Edges: (R. Alt. 45°) R= 0,1-0,5		Rev: 02