
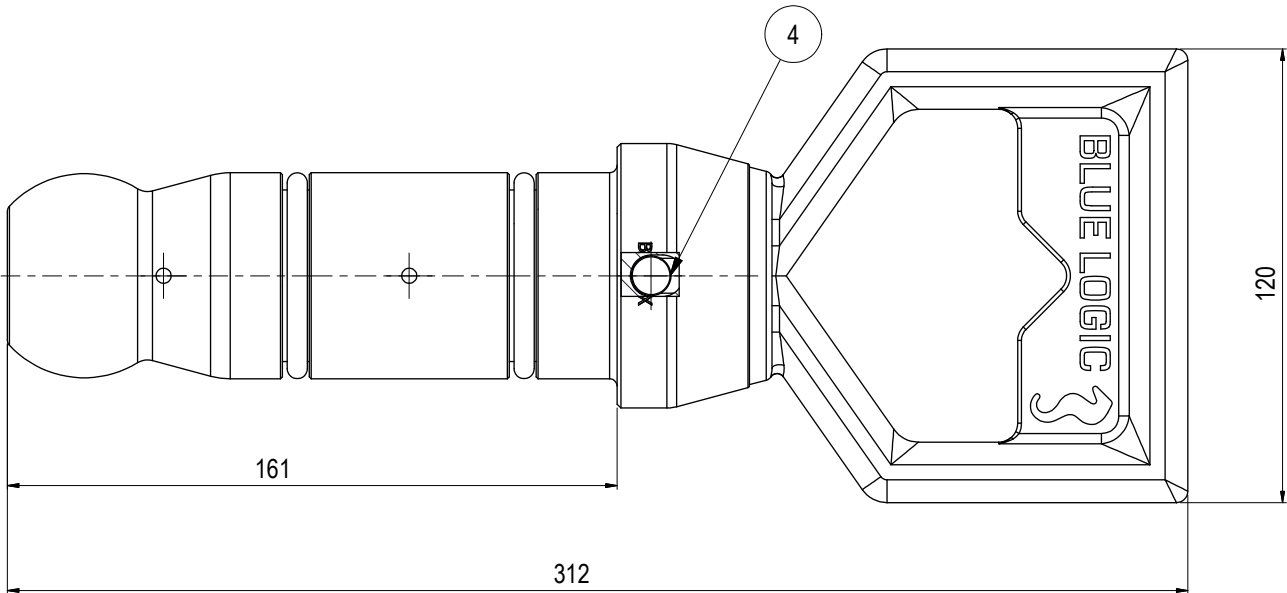
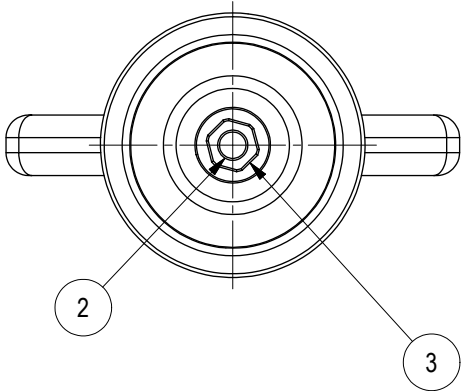



Parts List					
ITEM	QTY	PART No.	DESCRIPTION	MATERIAL	
1	1	PA0049	D-Handle SD	UNS J93404 Casted Super Duplex	
2	1	BA5150	Casted Fastening Bracket with Rod for D-handle 138mm	S32750 SUPER DUPLEX	
3	1	BA3032	Lock Nut for Prot Stabs M8	S32750 SUPER DUPLEX	
4	1	BA2958	Lock Bolt for D-Handle	S32760 SUPER DUPLEX	
5	1	BA1562	Ø55 SP Prot Stab Body Vented Long-term	PEHD 1000	
6	2	100201	O-Ring BS327 D1=43,82 D2=5,33	NBR 70	

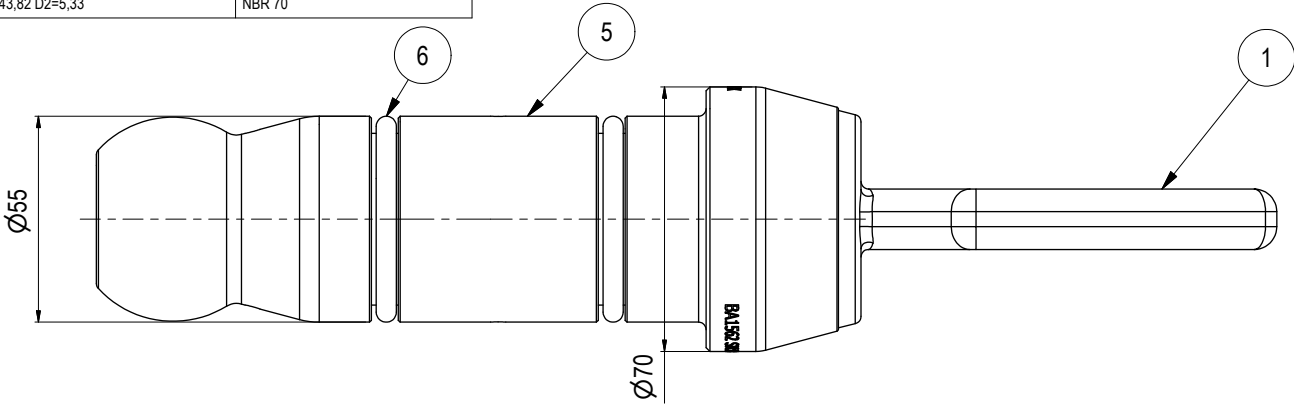

NOTE: 1
DESIGN CODE:
API 17H Type 4

NOTE: 2
TECHNICAL CLASSIFICATION:
Article Type: 001-Hot Stabs
Main Group: 1.04. Ø55 Hot Stab
Intermediate Group: 1.4.03. Protection
Sub Group: 1.4.15.01. Single

NOTE: 3
INTERFACE INFORMATION:
Pressure Rating Bar: Vented
Design Water Depth: 3000
Material: Long-term
Weight in Air: 1,5 kg
Volume: 0,55 dm³
Submerged Weight: 0,97 kg
Surface Area: 1014 cm²
Hydraulic: N/A
Mechanical: N/A
Electrical: N/A
Com. & Protocol: N/A

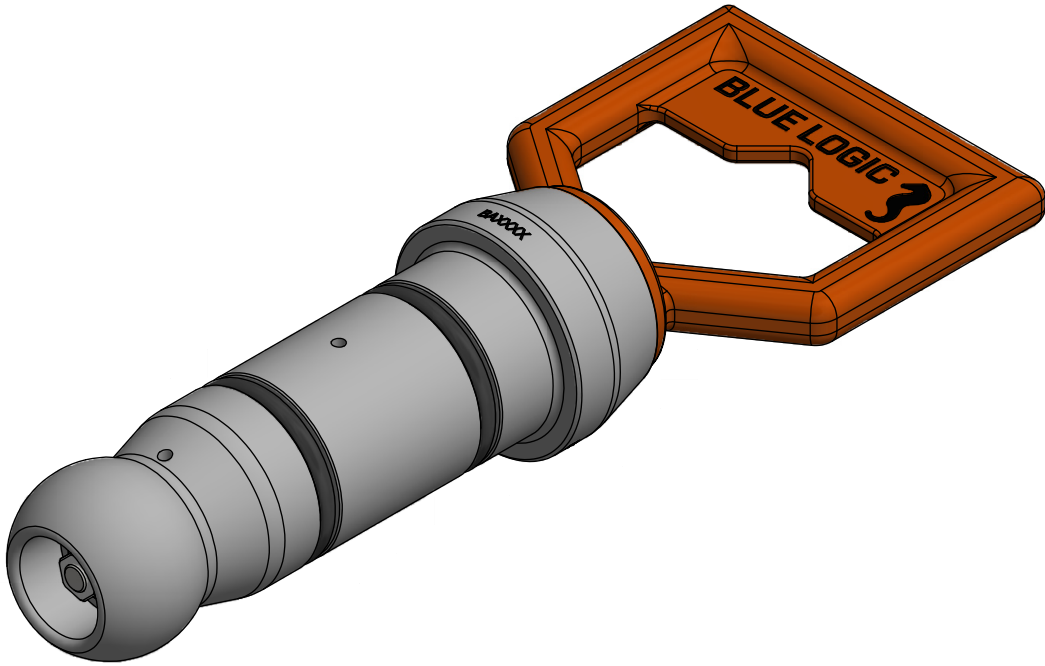

07	13.1.2022	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
06	21.3.2018	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
05	9.11.2017	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
04	5.6.2014	9-IFU (Issued for Use)		WTJ	HNJ	WTJ
Rev.	Date	Reason for issue	Revision change	Made	Chk'd	Appr.

BLUE LOGIC 

Dwg Scale:
NTS
Dwg Proj:
Dwg Format:
A3

Drawing title:
Ø55 SP Prot Stab Vented Long-term

Drawing number:
BA1560

Rev.
07